




Compact lights
4017506136559
L 300, B 215, H 110

portable, Wall (surface)
signal blue (RAL 5005)

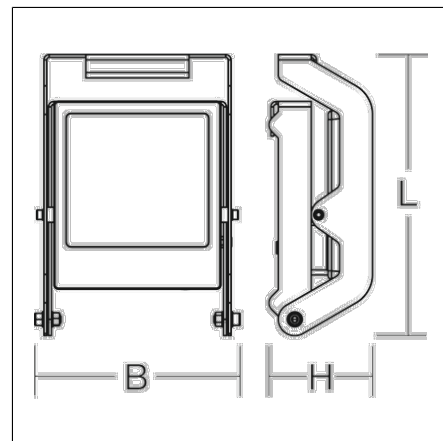

LED spotlight. Robust, powder-coated steel frame. Housing impact-resistant and break-proof (polycarbonate). Cover opal, made of impact- and break-resistant plastic (polycarbonate). Uniform, soft and glare-reduced illumination. Heavy rubber power supply cable H07RN-F for high mechanical loads with mains plug. Luminaire with limited surface temperature in accordance with EN 60598-2-24.

Product specifications

Length L	300 mm
Width B	215 mm
Height H	110 mm
Weight	1.4 kg
Supply cable / plug	3 m, H07RN-F, 2 x 1,0 mm ² / Typ E+F Konturenst. (CEE 7/17)
Light source	LED
Colour temperature	5000 K
Rated luminous flux	5000 lm
System power	30 W
System efficiency	167 lm/W
Glare evaluation RUG (4H 8H)	28,7
Beam angle	106°
Rated life	30000 h (L90/B10)
Colour rendering index (CRI)	80
Colour tolerance (McAdam)	6 SDCM
Photobiological safety according to EN 62471	Risk group 0
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	4
Luminaires on B16A fuse	7
Luminaires on C10A fuse	7
Luminaires on C16A fuse	12
Inrush current / Inrush current duration	32.8 A / 203 µs
CIE Flux Code / CEN Flux Code	54 88 99 100 100
Type of protection	IP 65
Protection class	II
Filament test	650 °C
Impact resistance	IK06
Ambient temperature	-30 °C bis + 35 °C
Safety marks	D-mark
Conformity mark	CE

AKIRUS

70-2200-0006 | Compact lights

