



GLADIATOR Pocket

70-3100-0006 | Compact lights

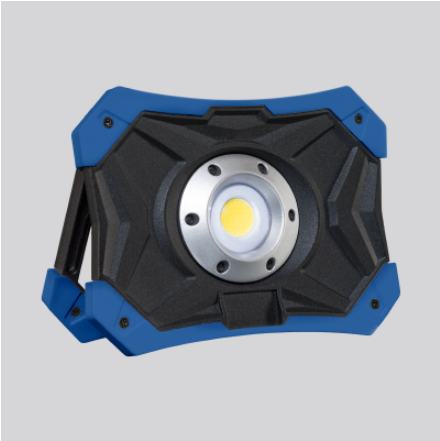

Compact lights
4017506122279
L 171, B 125, H 44

portable
black

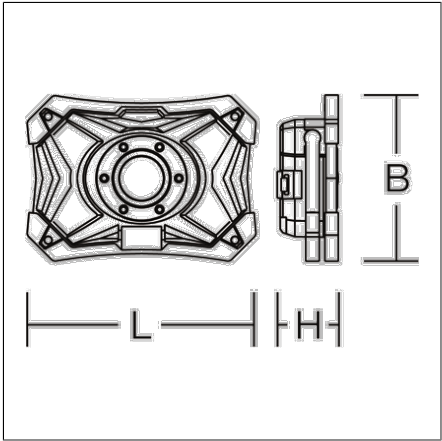

Mobile, mains-independent battery-operated work light. Housing made of robust die-cast aluminium with soft edge protection made of TPE (thermoplastic elastomer). Highly efficient COB LED. Beam angle adjustable with handle. Multi-level switchable with push-button. (OFF, 25, 50, 100%). Built-in Li-Ion battery. (4.400 mAh). Operating time up to 10 hours. Charge status display. With powerbank function for charging external equipment. Incl. charging cable. (USB-A > Micro-USB)

Product specifications

Length L	171 mm
Width B	125 mm
Height H	44 mm
Weight	0.665 kg
additional functions	with switch
Light source	LED
Colour temperature	6500 K
Rated luminous flux	1000 lm
System power	10 W
System efficiency	100 lm/W
Glare evaluation RUG (4H 8H)	30
Beam angle	102°
Rated life	25000 h
Colour rendering index (CRI)	80
Colour tolerance (McAdam)	3 SDCM
Photobiological safety according to EN 62471	Risk group 1
CIE Flux Code / CEN Flux Code	68 99 100 100 100
Type of protection	IP 54
Protection class	III
Impact resistance	IK05 (0.70 Joule)
Conformity mark	CE

GLADIATOR Pocket

70-3100-0006 | Compact lights

