
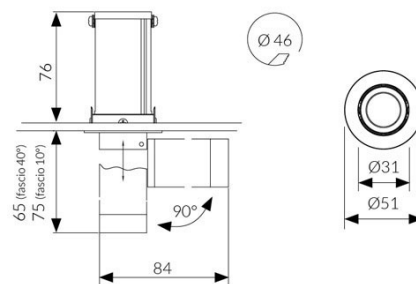


## TERES MICRO ZOOM RECESSED

Version with adjustable beam lens

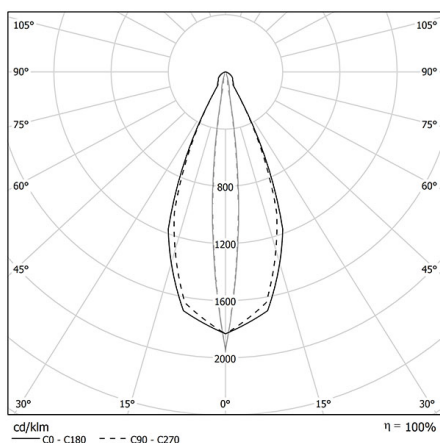

| CODE       |  | FLUX  | SIZE | CERTIFICATIONS                         |
|------------|-------------------------------------------------------------------------------------|-------|------|----------------------------------------|
| 14ZM3K4NRD | 3W 4000K                                                                            | 262lm | 31mm | CE IP 40 LED ENERGY EFFICIENCY CLASS F |

### Optic

Internal lens: adjustable emission from 10° to 40°, UGR<19

### Specifications

Built-in driver;  
CRI>90;  
McAdams 3;  
Life Time: L80/B10 >50.000h;  
5 years complete warranty;  
Eye safety: RG0/RG1 in accordance with EN62471:2009

### Body

Manufactured from pressure die-cast aluminum with epoxy powder coating.

### Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

### Wiring

D: Standard wiring is 220-240V, DALI dimmable