
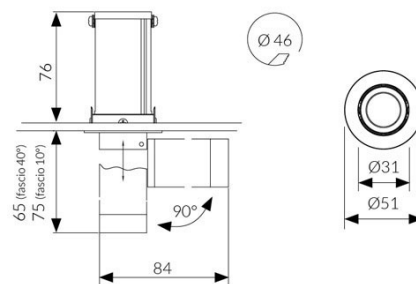


TERES MICRO ZOOM RECESSED

Version with adjustable beam lens

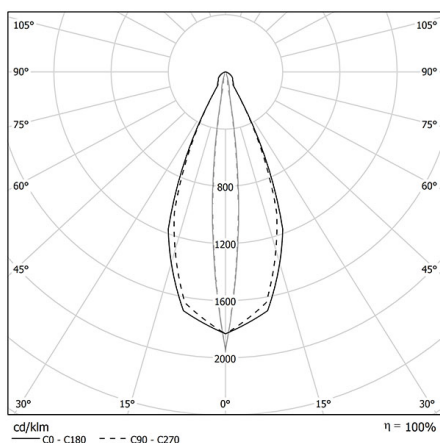

CODE		FLUX	SIZE	CERTIFICATIONS
14ZM7K4NR	7W 4000K	560lm	31mm	CE IP 40 LED ENERGY EFFICIENCY CLASS F

Optic

Internal lens: adjustable emission from 10° to 40°, UGR<19

Specifications

Built-in driver;
CRI>90;
McAdams 3;
Life Time: L80/B10 >50.000h;
5 years complete warranty;
Eye safety: RG0/RG1 in accordance with EN62471:2009

Body

Manufactured from pressure die-cast aluminum with epoxy powder coating.

Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97