




TIMR-PA 201.930.EW



Colours	Article no.	EAN
ash	665552	4043544794956

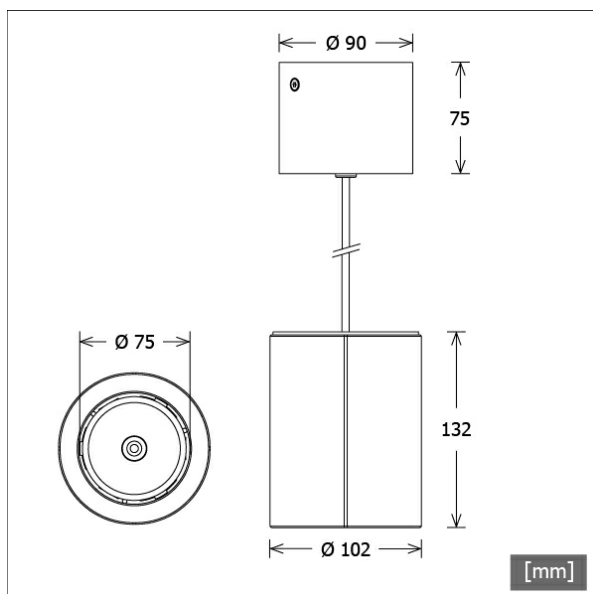

Description

- sustainable pendant luminaire with cylindrical ash wood housing
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management via integrated aluminium support frame (no heat sink required)
- high-tech reflector lense made from PMMA for optimum light output and glare-free lighting
- black ceiling box with feed-in made from aluminium (D = 90 mm, H = 75 mm)
- suspension with black textile cable (2 x 0.5 mm², length: 1500 mm)
- ceiling box for screw mounting
- 3-pole prefabricated connecting cable
- ballast (LED converter) integrated in ceiling box

Notes

..

Lighting data / Norms

EPREL light sources	1024000
System power	13.4 W
Luminaire luminous flux	1790 lm
System efficiency	133.58 lm/W
Module efficiency	136.81 lm/W
UGR class	≤25
Beam range	Extra Wide Flood
Beam angle	65°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	102 mm
Inner diameter	75 mm
Height	132 mm
Net weight	1.09 kg
Gross weight	1.15 kg

TIMR-PA 201.930.EW

TIMR-PA 201.930.EW

Timba Round | Pendant (1xLED 13W 830/3000K 1790lm)

— C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	828	828	828	828
15°	871	871	871	871
30°	539	539	539	539
45°	92	92	92	92
60°	28	28	28	28
75°	9	9	9	9
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		
3.0	3.81	164.6
6.0	7.61	41.2
9.0	11.42	18.3
12.0	15.23	10.3
15.0	19.03	6.6

η	LED
Efficiency	138 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	13 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.9
UGR C90/C270	23.9
CIE Flux Codes	87 97 99 100 100
Ra/CRI	>80

LTS