


CLOE/C3

7053C34010CL

TEC-MAR®
LIGHTING




SPECIFIC PRODUCT

Mod	C3
Color	Dark brown
Installation	Outdoor and indoor led fitting for wall installation
Application	Indoor, Outdoor
Materials	Die cast aluminium body painted with dark brown epoxypolyester powder
Insulation class	Class I
Protection index	IP66
Impact degree	IK08
Ambient temperature (Ta)	'-25 / 45 °C
Optics	30° narrow beam reflector in metallized polycarbonate with high flux efficiency. Extra-clear glass diffuser
Beam angle	30°
Power supply	220-240Vac
Frequency	50/60Hz
Led modules	Removable (Class: D)
Standard equipment	<div>- 800 mm long H05RN-F 3x1 mm² neoprene cable.</div> <div>- Anti-condensation osmotic valve.</div> <div>- AC direct led board with phase cut dimming.</div>
Luminous flux maintenance	<div>L80-B50 > 75.000 h</div> <div>L80-B20 > 50.000 h</div>
Wiring	Removable
Step Mac Adams	3 step
Photobiological safety class	Risk exempt group
Trademarks and certifications	CE / UNI EN 60598-1
Warranty	7 years

PRODUCT FEATURES

W tot.	mA	°K - CRI	Options	Lumen OUTPUT	Lm/W	A (mm)	B (mm)	C (mm)	D (mm)	Kg
10	-	4000°K - CRI>80	on/off	1002	100	130	100	95	-	0.8

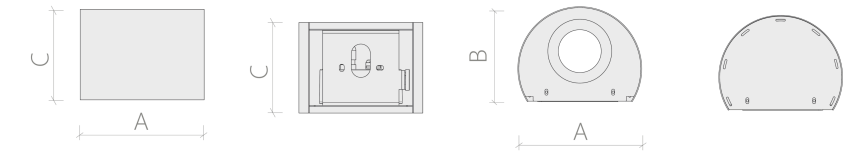

RELATED ACCESSORIES



ACC241

Universal dimmer with
230Vac phase cut output.

TEC-MAR[®]
LIGHTING

TEC-MAR S.r.l. Via delle Industrie 1, 26835 Crespiatica (LO) – Italy

TEC-MAR S.r.l. reserves the right, without notice, to modify the characteristics of its products as well as their availability at any time. All products, related technical data, illustrations and information are not binding for TEC-MAR S.r.l. TEC-MAR S.r.l. will not be liable for any illustrative, textual and/or translation errors. All values reported are measurement values. Flow, CCT and power data are within tolerances of +/- 10%.

29-02-2024