




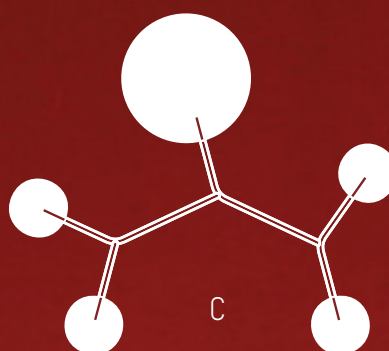

The striking Ballon Wall 5 is available in three highly-adjustable options, catering for highly individual needs in lighting and aesthetics.

Ballon wall 5

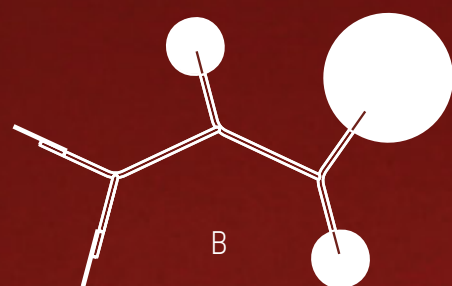

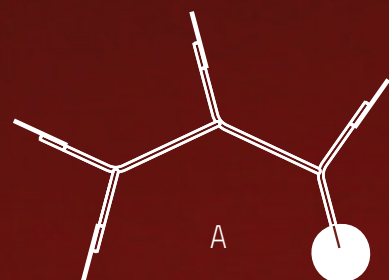


Ballon wall 5


TUNTO

TECHNICAL SPECIFICATIONS


Frame and
110 mm panel
colors



250 mm panel
colors and
materials



Wood Surface Finish: Lacquer

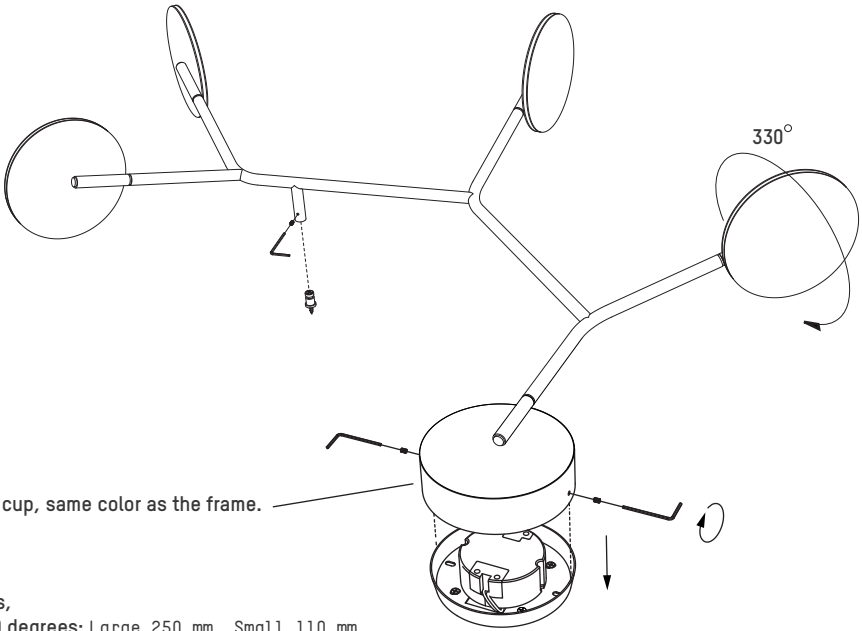

110mm Mounting cup, same color as the frame.

Adjustable panels,
Panels rotate 330 degrees: Large 250 mm, Small 110 mm

Drivers / Built-in

500 mA	non dimmable	TRI LC
--------	--------------	--------

Drivers / External

500 mA	DALI, PUSH DIM	LCM25DA
	CASAMBI DIM	LCM40BLE

Rated Power	20 W	Kelvin	2700, 3000 K
Voltage	220-240V 50/60 Hz,	Lumen	800 lm
Output	36 V 500 mA	CRI	97, R9=91
Cord Length	External driver cable length, Standard 3 m,	Package Size	920 x 710 x 230 mm
Frame color	Black RAL 9005 fine efekt, White RAL 9003 fine efekt	Package Weight	7 kg

INDOOR USE ONLY

NON-USER REPLACEABLE LIGHT SOURCE

IP20

CE



Collection