


Ura

ref. **UR304**

Pendant lamp
Lámpara colgante

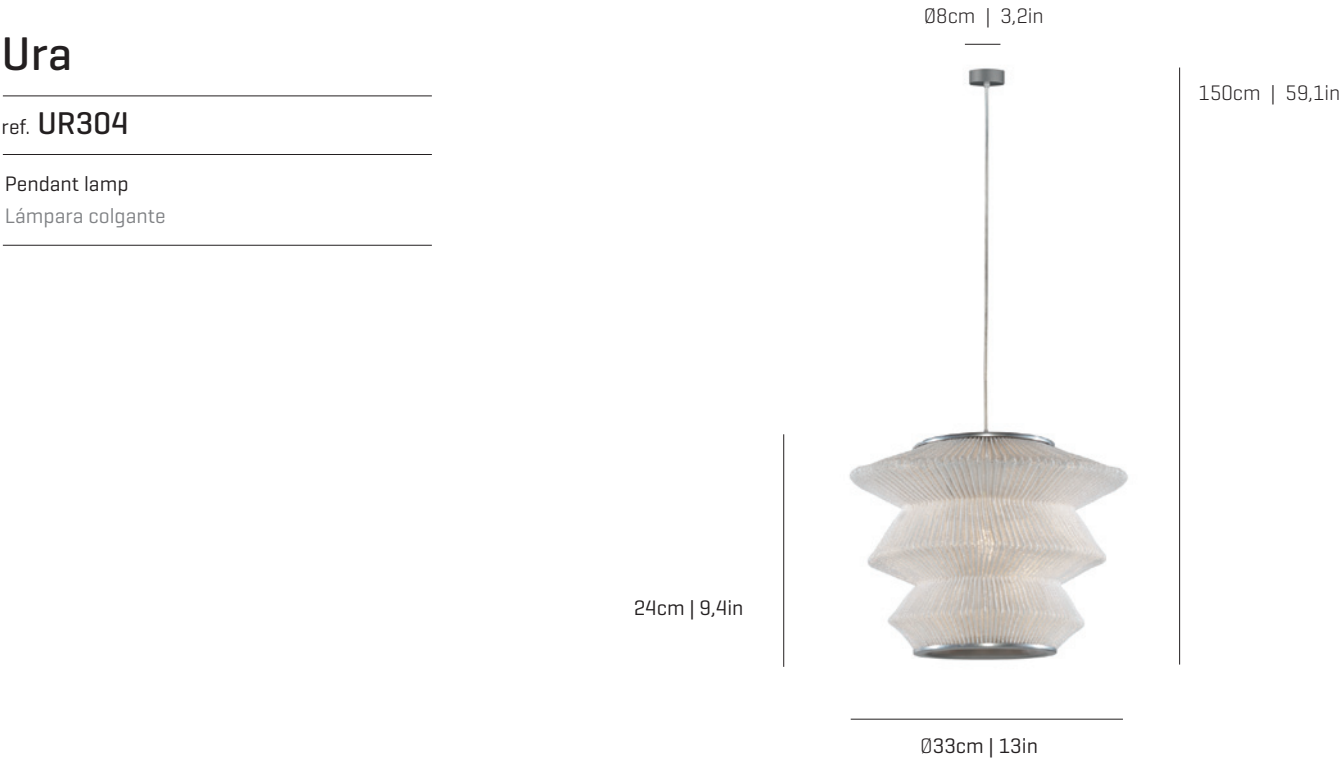

Ura Collection



MATERIAL FINISHES

MATERIALES Y ACABADOS

LAMPSHADE

TULIPA

Painted stainless steel
Acero inoxidable pintado

One colour to choose
Un color a elegir



*For orders of 5 or more units select any color NCS
*A partir de 5 unidades elegir color NCS

CANOPY AND CABLE

FLORÓN Y CABLE

Steel gloss nickel-plated
Acero níquel-satinado

Black or transparent cable
Cable negro o transparente

LIGHT SOURCE

FUENTE DE LUZ

230V - 50Hz

- E27 - Max. 1x100 W
- E27 LED - Max. 1x12 W
- E27 ECO - Max. 1x77 W

120V - 60Hz

- E26 Med. - Max. 1x100 W
- E26 Med. - Max. 1x42 W

ENERGY EFFICIENCY

EFICIENCIA ENERGÉTICA

from A+ to E
desde A+ a E

OTHER TECHNICAL DATA

OTROS DATOS TÉCNICOS

PACKAGING

EMBALAJE

36x36x30cm | 14,2x14,2x11,8in
1,5kg | 3,3lb

ELECTRICAL FEATURES

CARACTERÍSTICAS ELÉCTRICAS



CERTIFICATIONS

CERTIFICACIONES




Ura

LED

ref. **UR304-LD**

LED / DIMMABLE

Pendant lamp
Lámpara colgante

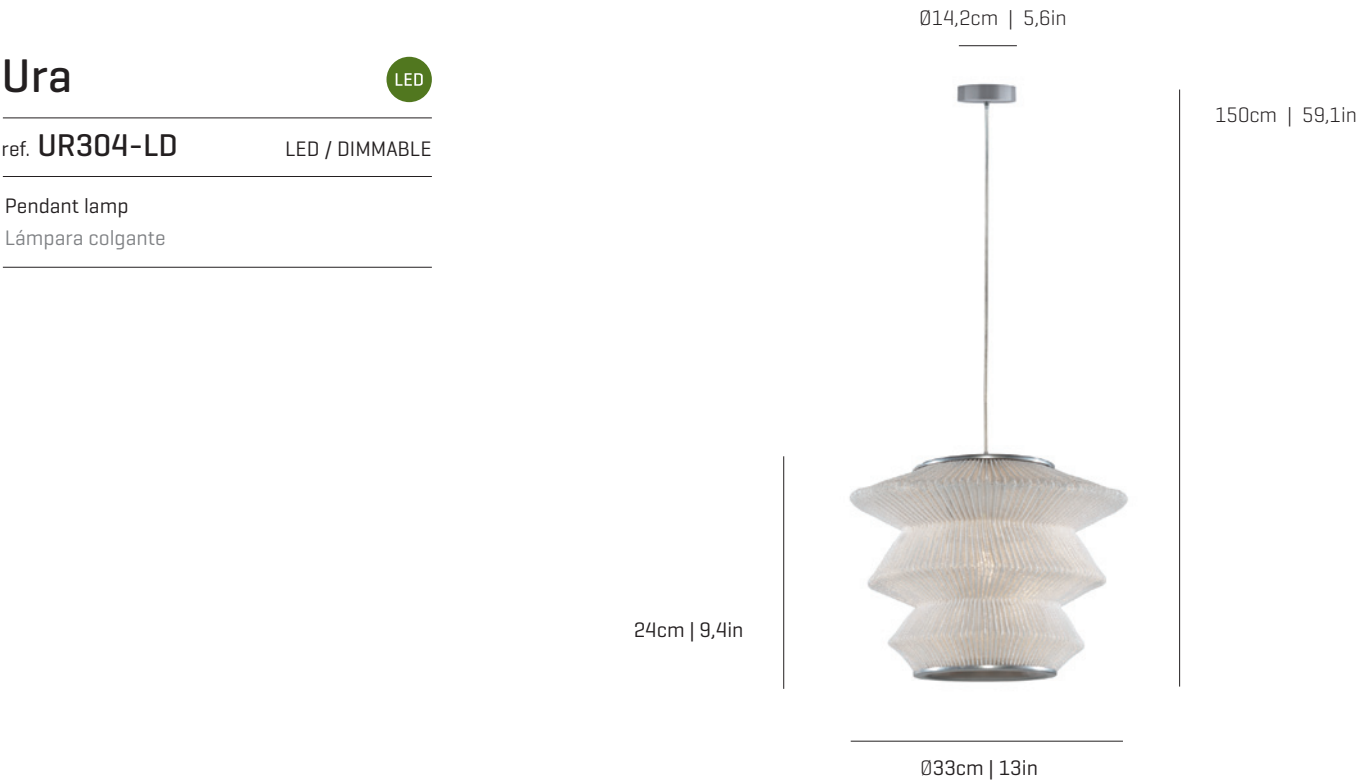

Ura Collection



MATERIAL FINISHES
MATERIALES Y ACABADOS

LAMPSHADE
TULIPA

Painted stainless steel
Acero inoxidable pintado

One colour to choose
Un color a elegir



*For orders of 5 or more units select any color NCS
*A partir de 5 unidades elegir color NCS

CANOPY AND CABLE
FLORÓN Y CABLE

Steel gloss nickel-plated
Acero níquel-satinado

Black or transparent cable
Cable negro o transparente

LIGHT SOURCE
FUENTE DE LUZ

230V - 50Hz

18,1W 3000K 1776lm built-in
upon request 2700K 1645lm

Dimming system: DALI / Switch DIM
upon request PHASE CUT

120V - 60Hz

18,1W 3000K 1776lm built-in
upon request 2700K 1645lm

Dimming system: 0-10V

ENERGY EFFICIENCY
EFICIENCIA ENERGÉTICA

from A++ to A
desde A++ a A

OTHER TECHNICAL DATA
OTROS DATOS TÉCNICOS

PACKAGING
EMBALAJE

36x36x30cm | 14,2x14,2x11,8in
2kg | 4,4lb

ELECTRICAL FEATURES
CARACTERÍSTICAS ELÉCTRICAS



CERTIFICATIONS
CERTIFICACIONES

