


BOLLARD LUMINAIRE

WOODY

Version 01

Woody is a bollard luminaire that is installed on the ground usually in the pathway and landscape area.




Technical Data

Color temperature(K)		16W	
3000K 4000K			
Protection class			
IP54			
Controls			
On/Off			
Certifications			
Registration of Broadcasting and Communication Equipments			
Features	Light source	High-performance LED	
	Luminaire luminous flux (based on 3000K)	1360 lm	
	Luminaire efficacy	85 lm/W	
	Color temperature	3000K, 4000K	
	CRI	Ra ≥ 80	
Physical	Housing material	Cast aluminum, Wooden pole	
	Cover material	White opal acrylic	
	Gasket material	Silicone gasket	
	Finish	Dark gray (powder-coated) color	
	Size	Ø200(W) x 950(H)	
	Weight	3.3 kg	
Electrical & Control	Power consumption	16W	
	Input voltage	220~240Vac 50~60Hz	
	Control	On/Off Switchable	
	Power factor	≥0.90	
	Power supply	Integral driver	
Environmental	Operating temperature	-30℃ to 50℃	
	Storage temperature	-40℃ to 70℃	
	Ingress protection rating	IP54	

Photometric Data

Power Consumption: 16W

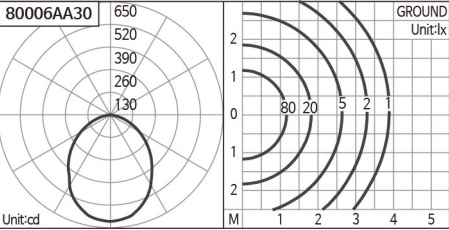

CCT (K)	3000K	4000K
Luminous Flux (lm)	1360	>1360

Ordering

Code	W		K	Finish	Size(mm)	Control
	16W		3000K	Dark gray	Ø200 x 950	On/Off
			4000K			

Code	W	lm	K	Finish	Size(mm)	Control
80006AA30	16W	1360	3000K	Dark gray	Ø200 x 950	On/Off
80006AA40	16W	>1360	4000K	Dark gray	Ø200 x 950	On/Off