


**FALLING IN** alu pol  
DC02-3

warmDIM

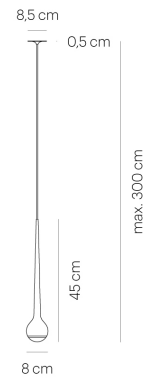

**TECHNICAL SPECIFICATIONS**

Lamp holder	LED
Mounting method	ceiling-mounted (recessed)
warmDIM	Yes
Light emission	direct
Light distribution	symmetric
Level of light output efficiency	100 %
Luminaire luminous flux	770 lm
Color temperature	2700-2200 K
Power consumption (maximum)	11 W
Colour rendering index (CRI)	> 90
Beam angle	25
White impression	warm white
Rated voltage (range)	220-240 V / 120 V
Power frequency	50/60 Hz
Surface	polished
Housing material	aluminium
Type of lamp control gear	Driver
Ballast included	Yes
Protection class	II
Energy efficiency	A - A++
Dimmable	Yes
Diameter	80 mm
Mounting depth	60 mm
Mounting diameter	68 mm
Suspension length	-/2000 mm
Net weight	0,90 kg
Fire protection "F"	Yes

**LIGHT DIAGRAM**

