



APLIK

Design by Serge & Robert Cornelissen


Aluminium wall lamp available in several colours.

Typology: WALL

Ratings

- Built in line voltage **LED** module
- CCT 3000 K
- Uplight
- Surface installation over holes
- Supply voltage ~220-240V
- Switch mode: on-off dimmable trailing edge
- Die cast aluminium body, painted

Product code composition

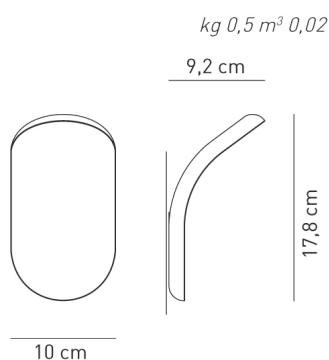

LIK

Type	Article	Colours	Code End	Source
AP	LIK XXX	BC wrinkled white	XX	LED 16,6W - diffused beam 3000K
		BR matt bronze		
		NI matt nickel		


ADA 220-240VAc **LED** ~1480 lm 89 lm/W

example composition code | **AP** | **LIKXXX** | **BR** | **XX** | **LED**


Available colors



BC
Wrinkled
white



BR
Matt
bronze



NI
Matt
nickel

EELc (Energy Efficiency Label compatibility) contain built in LED lamps that cannot be changed: A, A+, A++

CUSTOMER _____ NOTES _____

APLIKXXX_XXLED

NOTICE:

Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is estimated based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.