
atelier sedap / LIGHTING

3206 / TROCADERO ROND


Design Fabrice BERRUX

High strength plaster recessed fitting, with COB LED, MR16, GU10 or IP65 equipment, especially designed for ceilings.



Weight 2 Kg Orientation

①

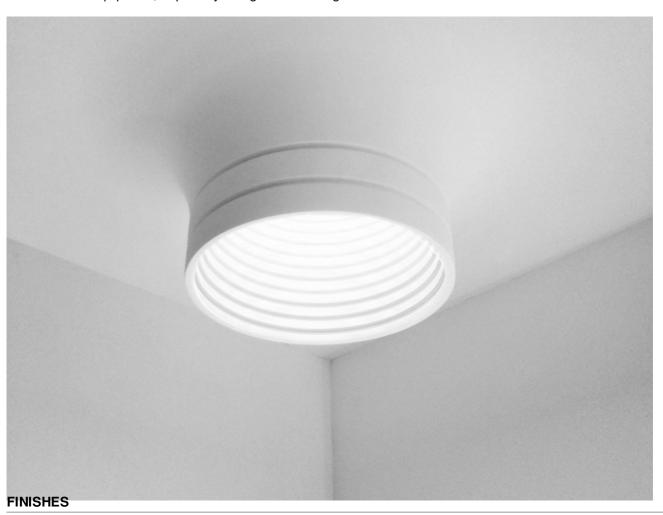

Natural plaster finish

AA

LIGHT SOURCES

REFERENCE	SOURCES	FEATURES
3206.AA.16	1 downlight LED COB 230/240V white, adjustable	□ IP 20 (€ \$\forall 960 °C
	9.5W / 36° / 760 lm / 3000K° / IRC>90 / IP20	
	Dimmable TRIAC	
3206.AA.26	1 downlight LED COB 350mA white, adjustable	♠ IP 20 (€ \$\overline{\psi}\) 960°C
	12.2W / 36° / 1170 lm / 3000K° / IRC>90 / IP20	V CC V
	Dimmable DALI, 1-10V or PushDim (power supply not included)	
3206.AA.06	1 downlight IP65 LED COB white (CREE)	□ IP65 (€ \$\tilde{\bigs_960°C}
	9W / 55° / 650 lm / 200mA / 3000° K / IRC>80 / IP65	
	2700° or 3000°K (Not dimmable power supply included)	
3206.AA.05	1 MR16 adjustable downlight included (black or white)	♠ IP 20 (€ ▼ 960°C
	P. maxi 50 W / GX5.3	V CC √
	(Bulb and power supply not included)	
3206.AA.07	1 GU10 adjustable downlight included (black or white)	□ IP 20 (€ \$\overline{\mathbb{F}}\ 960°C
	P. maxi 50 W / GU10 / 230V (Bulb not included)	
	Overall recessed height 165mm	