

MAMBA







code: **40022/2700/BI**

DESIGN **EMILIANA MARTINELLI** 2017



LINEAR MODULE TO CREATE A MODULAR SYSTEM WITH DIFFUSED LIGHT SUSPENSION. THE SYSTEM IS COMPOSED BY LINEAR (40022) AND CURVED (40020 - 40021 - 40053) MODULES, ROTATIONAL MOULDED, WHITE POLYETHYLENE MATERIAL. THE COMBINATION OF MODULES, THROUGH ALUMINIUM JOINTS (40026/BI INTERMEDIATE JOINT - 40027/BI TERMINAL JOINT), ALLOWS YOU TO CREATE LINEAR PATHS, SINUOUS OR CIRCULAR PATHS OF Ø 95CM (3 CURVED MODULES 40021) AND Ø 180CM (6 CURVED MODULES 40020). LED LIGHT SOURCE INTEGRATED, DRIVERS INSERTED INTO THE CEILING STUD (CODE 40025/BI - 40025/DIM/BI) OR INTO THE FALSE CEILING. DIMMABLE PUSH/DALI, TRIAC 5 WIRES, 0-10V AND 1-10V.

TECHNICAL DRAWINGS


UTILIZATION: INTERNAL		TYPOLOGY: HANGING		
COLOURS	STRUCTURE: DIFFUSER:	WHITE WHITE		
MATERIALS	STRUCTURE: DIFFUSER:	ALUMINIUM POLYETHYLENE		
MEASURES	WIDTH: - HEIGHT: 11 cm LENGTH: 88 cm DEPTH: -	DIAMETER: - HOLE DIAMETER: - HOLE DEPTH: -	WEIGHT NET: - GROSS: -	
	PACKAGING VOL.M³: -		NUMBER OF ITEMS: 1	
BULBS	LED 1X25W FLUX: 3000LM KELVIN: 2700° CLASS: A++ CRI: - COLOR TOLERANCE: - DURATION: - 			
DEVICE SPECIFICATIONS				
TYPE OF EMISSION: DIFFUSED POWER: 28 W FLOW LAMP: 2971 lm BEAM ANGLE: - DEVICE EFFICIENCY: 106.1lm/W IMPACT RESISTENCE: - GLOW WIRE TEST: -		POWER SUPPLY CABLE LENGTH: 400cm LENGTH OF HANGING CABLE: 350cm SUPPLY: INCLUDED POWER SUPPLY ASSEMBLY: EXTERNAL TYPE OF DIMMING: PUSH/DALI, TRIAC 5 WIRES, 0-10V AND 1-10V VOLTAGE: 230 V		
POWER SUPPLY: ELECTRONIC DIMMABLE POWER SUPPLY				
CERTIFICATIONS	   			
MARKETS	THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES: EUROPE			

MAMBA

code: *40022/2700/BI*

DESIGN **EMILIANA MARTINELLI** 2017

PHOTO GALLERY

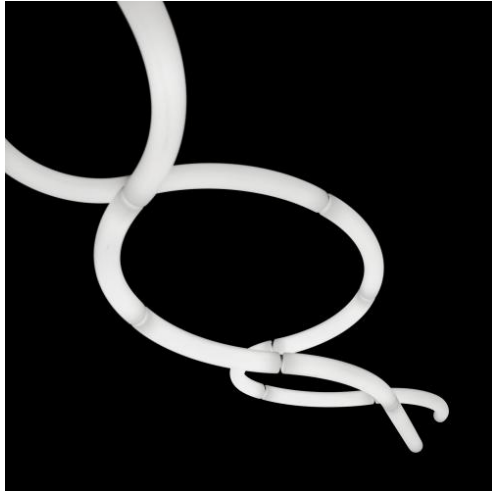

MAMBA







code: **40022/4000/BI**

DESIGN **EMILIANA MARTINELLI** 2017



LINEAR MODULE TO CREATE A MODULAR SYSTEM WITH DIFFUSED LIGHT SUSPENSION. THE SYSTEM IS COMPOSED BY LINEAR (40022) AND CURVED (40020 - 40021 - 40053) MODULES, ROTATIONAL MOULDED, WHITE POLYETHYLENE MATERIAL. THE COMBINATION OF MODULES, THROUGH ALUMINIUM JOINTS (40026/BI INTERMEDIATE JOINT - 40027/BI TERMINAL JOINT), ALLOWS YOU TO CREATE LINEAR PATHS, SINUOUS OR CIRCULAR PATHS OF Ø 95CM (3 CURVED MODULES 40021) AND Ø 180CM (6 CURVED MODULES 40020). LED LIGHT SOURCE INTEGRATED, DRIVERS INSERTED INTO THE CEILING STUD (CODE 40025/BI - 40025/DIM/BI) OR INTO THE FALSE CEILING. DIMMABLE PUSH/DALI, TRIAC 5 WIRES, 0-10V AND 1-10V.

TECHNICAL DRAWINGS


UTILIZATION: INTERNAL		TYPOLOGY: HANGING		
COLOURS	STRUCTURE: DIFFUSER:	WHITE WHITE		
MATERIALS	STRUCTURE: DIFFUSER:	ALUMINIUM POLYETHYLENE		
MEASURES	WIDTH: - HEIGHT: 11 cm LENGTH: 88 cm DEPTH: -	DIAMETER: - HOLE DIAMETER: - HOLE DEPTH: -	WEIGHT NET: - GROSS: -	
	PACKAGING VOL.M³: -		NUMBER OF ITEMS: 1	
BULBS	LED 1X25W FLUX: 3000LM KELVIN: 4000° CLASS: A++ CRI: - COLOR TOLERANCE: - DURATION: - 			
DEVICE SPECIFICATIONS				
TYPE OF EMISSION: DIFFUSED POWER: 28 W FLOW LAMP: 2971 lm BEAM ANGLE: - DEVICE EFFICIENCY: 106.1lm/W IMPACT RESISTENCE: - GLOW WIRE TEST: -		POWER SUPPLY CABLE LENGTH: 400cm LENGTH OF HANGING CABLE: 350cm SUPPLY: INCLUDED POWER SUPPLY ASSEMBLY: EXTERNAL TYPE OF DIMMING: PUSH/DALI, TRIAC 5 WIRES, 0-10V AND 1-10V VOLTAGE: 230 V		
POWER SUPPLY: ELECTRONIC DIMMABLE POWER SUPPLY				
CERTIFICATIONS	   			
MARKETS	THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES: EUROPE			

MAMBA

code: *40022/4000/BI*

DESIGN **EMILIANA MARTINELLI** 2017

PHOTO GALLERY

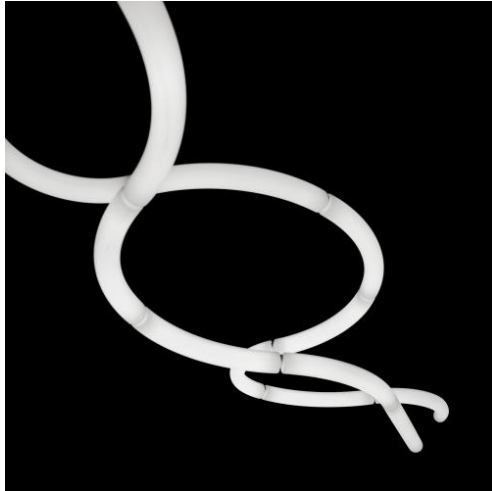

MAMBA


code: 40022/BI

DESIGN EMILIANA MARTINELLI 2017



LINEAR MODULE TO CREATE A MODULAR SYSTEM WITH DIFFUSED LIGHT SUSPENSION. THE SYSTEM IS COMPOSED BY LINEAR (40022) AND CURVED (40020 - 40021 - 40053) MODULES, ROTATIONAL MOULDED, WHITE POLYETHYLENE MATERIAL. THE COMBINATION OF MODULES, THROUGH ALUMINIUM JOINTS (40026/BI INTERMEDIATE JOINT - 40027/BI TERMINAL JOINT), ALLOWS YOU TO CREATE LINEAR PATHS, SINUOUS OR CIRCULAR PATHS OF Ø 95CM (3 CURVED MODULES 40021) AND Ø 180CM (6 CURVED MODULES 40020). LED LIGHT SOURCE INTEGRATED, DRIVERS INSERTED INTO THE CEILING STUD (CODE 40025/BI - 40025/DIM/BI) OR INTO THE FALSE CEILING. DIMMABLE PUSH/DALI, TRIAC 5 WIRES, 0-10V AND 1-10V.

TECHNICAL DRAWINGS

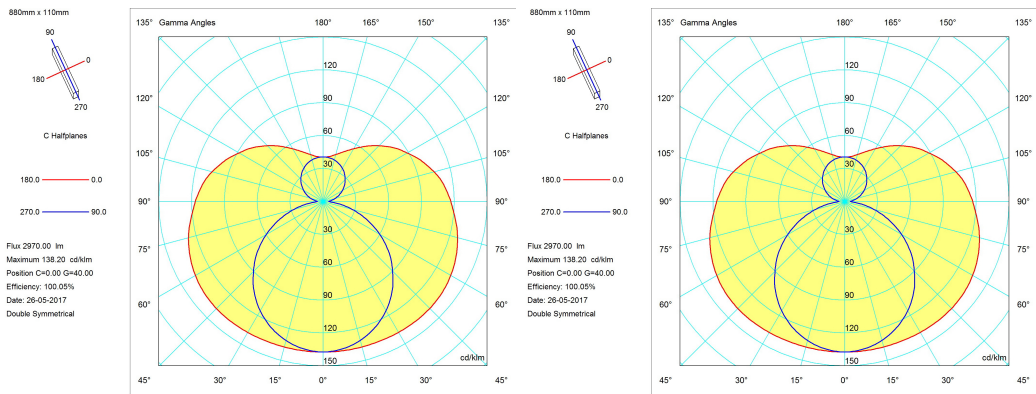

UTILIZATION: INTERNAL

TPOLOGY: HANGING



COLOURS

STRUCTURE:
DIFFUSER:

WHITE
WHITE

MATERIALS

STRUCTURE:
DIFFUSER:

ALUMINIUM
POLYETHYLENE

MEASURES

WIDTH: -
HEIGHT: 11 cm
LENGTH: 88 cm
DEPTH: -

DIAMETER: -
HOLE DIAMETER: -
HOLE DEPTH: -

WEIGHT NET: -
GROSS: -

PACKAGING VOL.M³: -

NUMBER OF ITEMS: 1

BULBS

LED 1X25W
FLUX: 3000LM
KELVIN: 3000°
CLASS: A++
CRI: >80
COLOR TOLERANCE: -
DURATION: 40000H

DEVICE SPECIFICATIONS

TYPE OF EMISSION: DIFFUSED
POWER: 28 W
FLOW LAMP: 2971 lm
BEAM ANGLE: -
DEVICE EFFICIENCY: 106.1lm/W
IMPACT RESISTANCE: -
GLOW WIRE TEST: -

POWER SUPPLY CABLE LENGTH: 400cm
LENGTH OF HANGING CABLE: 350cm
SUPPLY: INCLUDED
POWER SUPPLY ASSEMBLY: EXTERNAL
TYPE OF DIMMING: PUSH/DALI, TRIAC 5 WIRES, 0-10V AND 1-10V
VOLTAGE: 230 V

POWER SUPPLY: ELECTRONIC DIMMABLE POWER SUPPLY

CERTIFICATIONS



MARKETS

THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES:
EUROPE

MAMBA

code: *40022/BI*

DESIGN **EMILIANA MARTINELLI** 2017

PHOTO GALLERY

