

## CALABRONET


code: **40030/NE**

DESIGN EMILIANA MARTINELLI, ANDREA MENCHINI 2017



MODULE 40030/NECOMBINABLE SWIVEL SYSTEM, DIRECT/INDIRECT DIFFUSED LIGHT. COMPOSED OF TWO LENGTH OF ALUMINIUM TUBULAR PROFILES (70CM - 160CM) CONNECTED TOGETHER WITH A PARTICULAR JOINT (40032/NE) FOR DIFFERENTS CONFIGURATIONS. FOR G5 T5 8W/20W TUBE LED (40030/NE - 40031/NE) AND CEILING STUD FOR THREE PROFILES, TO BE FIXED ON THE CEILING. VARIATION (40033/NE) WITH SPOTS FOR LIGHT SOURCE LED INTEGRATED AND ELECTRONIC DRIVER INSERED INTO THE STUD, TO BE FIXED ON THE CEILING OR FALSE CEILING FOR TWO CONTIGUOUS MODULES.

### TECHNICAL DRAWINGS

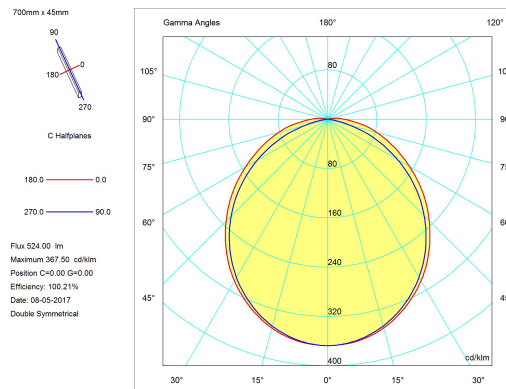

UTILIZATION: **INTERNAL**

TPOLOGY: **HANGING**



COLOURS STRUCTURE: **BLACK**  
DIFFUSER:

MATERIALS STRUCTURE: **ALUMINIUM**  
DIFFUSER: **OPAL POLICARBONATE**

MEASURES WIDTH: -  
HEIGHT: -  
LENGTH: **70 cm**  
DEPTH: -

DIAMETER: **4,5 cm**  
HOLE DIAMETER: -  
HOLE DEPTH: -

WEIGHT NET: **3**  
GROSS: -

PACKAGING VOL.M<sup>3</sup>: -

NUMBER OF ITEMS: **1**

### BULBS

LED 1X8W G5 T5  
FLUX: 524LM  
KELVIN: 3000°  
CLASS: A++  
CRI: 3000  
COLOR TOLERANCE: -  
DURATION: 40000H

### DEVICE SPECIFICATIONS

TYPE OF EMISSION: **DIRECT**  
POWER: **8 W**  
FLOW LAMP: **525 lm**  
BEAM ANGLE: -  
DEVICE EFFICIENCY: **65.6lm/W**  
IMPACT RESISTANCE: -  
GLOW WIRE TEST: -

POWER SUPPLY CABLE LENGTH: **400cm**  
LENGTH OF HANGING CABLE: **350cm**  
SUPPLY: -  
POWER SUPPLY ASSEMBLY: -  
TYPE OF DIMMING: -  
VOLTAGE: **230 V**

POWER SUPPLY: -

### CERTIFICATIONS



### MARKETS

THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES:  
**EUROPE**

**CALABRONET**  
code: *40030/NE*

DESIGN EMILIANA MARTINELLI, ANDREA MENCHINI 2017

PHOTO GALLERY

---

