

**MOON UNIT
WANDAUFBAULEUCHTE**

W

ITEM NUMBER

547-20145




Sample image

PRODUCT DETAILS

Wall/ceiling luminaire, with white opal polyethylene diffuser, incl. wall brackets and transparent power-feed with plug and foot-switch, endpiece made of galvanised pearlchrome brass, cable 2000mm, incl. converter.

DRAWING

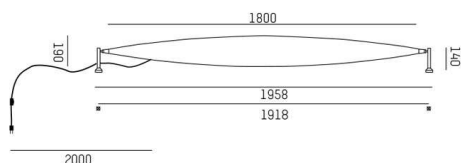

TECHNICAL DETAILS

No. of bulb holders		Voltage [V]	220-240V
Socket		Colour temp. [K]	4000K
Ceiling cutout [mm]		Beam angle [°]	
Recess depth [mm]		CRI	>90
Diameter [mm]		Luminous flux [lm]	4300
Length [mm]	1800	Ec [kWh/1000h]	
Width [mm]		Lifetime [h]	50000
Height [mm]	180	Energy efficiency cl.	A++-A
Troat [mm]		System perform. [W]	62
IP protection class	IP20	Voltage class [V]	
Customs tariff no.	9405104090	Bulb type	LED
EAN-Number	9008905534683	Colour finish	white opal
Net weight [kg]	6,245	Current sec.[mA]	

LIGHT DISTRIBUTION CURVE



Sample image

We reserve the right to make changes and improvements to the products and related data in this publication, at any time and without prior notice