


Rock_W4



Wall Lights | 220-240 V | topLED 9.5 W 250 mA | CRI 80
60735N00



| Technical data | |
|--|------------------|
| Installation position | Wall lights |
| Installation environment | Outdoor |
| Light Source | LED |
| Optics | General Lighting |
| Power | 9.5 W |
| Luminous flux (source) | 1472 lm |
| Frequency | 50 - 60 - Hz |
| CCT / Tonalità | 4000 K |
| Colour rendering index | 80 Ra |
| AC / DC | DC |
| Safety class | 1 |
| IP | IP55 |
| IK | IK05 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| ETL | No |
| Fire Rated (BS 476 PT21 compliant) | No |
| Operating temperature | -40°C / +100°C |
| Driver included | Driver |
| Induction | No |
| Emergency mode | No |
| Motion sensor | No |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | No |
| Resin potting | No |
| Type of light emission | Double emission |
| Net weight | 2.9 Kg |

| Finishing casing | |
|------------------|------|
| Colour | grey |

| Finishing diffuser | |
|--------------------|--------------|
| Material | Glass |
| Processing | Sandblasting |

Wall Lights | 220-240 V | topLED 9.5 W 250 mA | CRI 80
60735N00

Double emission wall lights for outdoor application. The natural white LED light source with a general lighting light distribution is composed of 52 topped LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 1472 lm, with a 154.9 lm/W nominal luminous efficacy.

The device body and features a grey finish; the diffuser is made of glass with a sandblasting treatment. The ingress protection degree is IP55; the total weight is of 2.9 kg.


The total absorbed power is 9.5 W.

The device features protection class I and can be wall lights-mounted.

| Illuminotechnical Features | |
|---------------------------------------|----------------|
| Light Output Ratio (LOR) | 55 % |
| Luminous flux (source) | 1472 lm |
| Luminaire luminous flux | 820 lm |
| Consumption | 10 W |
| Luminaire efficacy | 82 lm/W |
| Colour temperature | 4000 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Colour rendering index | 80 Ra |

| UGR | |
|-------------------|----------|
| X=4H Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |
| UGR transversal | < 19 |
| UGR axial | < 16 |

| OPTICAL | |
|-----------------------------|---------------|
| Light distribution simmetry | Symmetrical 2 |
| Ottica C0/C180 | 103° |
| Ottica C90/C270 | 100° |

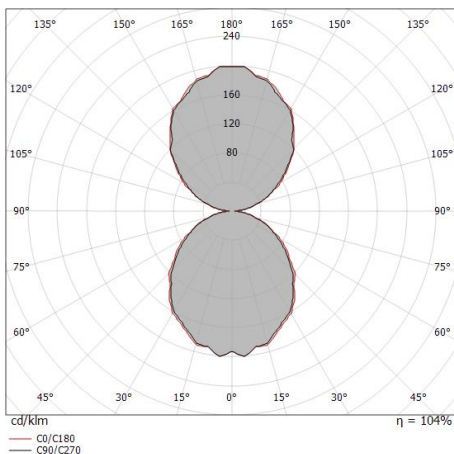

| Distance [m] | Cone diameter [m] | E(0°) | E(C90) | E(C0) |
|--------------|-------------------|-------|--------|-------|
| 0.5 | 1.20 1.25 | 631 | 87 | 81 |
| 1.0 | 2.39 2.50 | 158 | 22 | 20 |
| 1.5 | 3.59 3.74 | 70 | 10 | 9 |
| 2.0 | 4.78 4.99 | 39 | 5 | 5 |
| 2.5 | 5.98 6.24 | 25 | 3 | 3 |
| 3.0 | 7.18 7.49 | 18 | 2 | 2 |

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 102.6°)
 — C90/C270 (Half-peak divergence: 100.2°)