


Pendant Luminaires | 220-240 V | topLED 16 W 350 mA | CRI 90 | Warm Tune  
8142

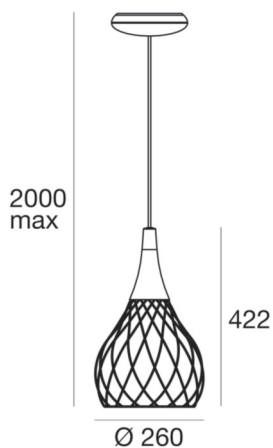

| Technical data                                 |                  |
|--|------------------|
| Installation position                          | Ceiling          |
| Installation environment                       | Indoor           |
| Light Source                                   | LED              |
| Optics   | General Lighting |
| Light emission direction                       | downward         |
| Power  | 16 W             |
| Luminous flux (source)                         | 1000 lm          |
| Frequency                                      | 60 - 50 Hz       |
| CCT / Tonaltà                                  | Warm Tune        |
| Colour rendering index                         | 90 Ra            |
| Safety class                                   | 1                |
| IP   | IP20             |
| Glow wire test                                 | 850°             |
| Direct mounting on normally flammable surfaces | Yes              |
| CE   | Yes              |
| ETL  | No               |
| Driver included                                | Yes              |
| Dimmable article                               | Phase cut        |
| Induzione                                      | No               |
| Emergency mode                                 | No               |
| Motion sensor                                  | No               |
| Directional                                    | No               |
| Tilting  | No               |
| Walk-over                                      | No               |
| Drive-over                                     | No               |
| Cable included                                 | No               |
| Resin potting                                  | No               |
| Net weight                                     | 1.625 Kg         |

| Finishing casing |                |
|------------------|----------------|
| Material         | Iron           |
| Processing       | Electroplating |

| Finishing diffuser |             |
|--------------------|-------------|
| Material           | PC          |
| Colour             | transparent |

| Finishing mounting frame |                |
|--------------------------|----------------|
| Material                 | Iron           |
| Processing               | Electroplating |



Pendant Luminaires | 220-240 V | topLED 16 W 350 mA | CRI 90 | Warm Tune  
**8142**

Single emission pendant luminaires for indoor application. The warm tune LED light source with a general lighting light distribution is composed of 1 topped LEDs with CCT of 1800K-3000K K and a CRI 90; the source luminous flux is 1000 lm, with a 62.5 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The device body is made of iron, processed by means of electroplating; the diffuser is made of PC; the mounting frame is made of iron, processed by means of electroplating. The ingress protection degree is IP20; the total weight is of 1.625 kg. The power supply driver is included in the delivery.


The total absorbed power is 16 W.

The device features protection class I and can be ceiling-mounted.

| Illuminotechnical Features            |                |
|---------------------------------------|----------------|
| Light Output Ratio (LOR)              | 55 %           |
| Luminous flux (source)                | 1000 lm        |
| Luminaire luminous flux               | 553 lm         |
| Consumption                           | 16 W           |
| Luminaire efficacy                    | 34 lm/W        |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Colour rendering index                | 90 Ra          |



| Pendant Luminaires | Accessories  
**8142**



Dimmer  
PUSH DIM, 220-240V

**Code**  
KIT0026



Dimmer  
Bluetooth, 85-240V

**Code**  
KIT0080