




Pendant Luminaires | 220-240 V | topLED 12 W 700 mA | CRI 90  
8647

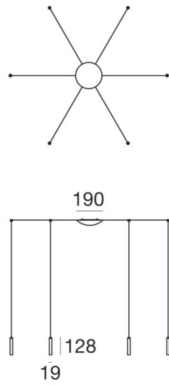

Technical data	
Designer	Davide Oppizzi
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optics	Flood
Light emission direction	downward
Power	12 W
Luminous flux (source)	1252 lm
Frequency	60 - 50 Hz
CCT / Tonalità	3000 K
Colour rendering index	90 Ra
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Yes
Dimmable article	Phase cut
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing casing	
Material	Aluminium
Colour	copper
Processing	Electroplating

Finishing diffuser	
Material	PC
Colour	transparent

Finishing mounting frame	
Material	Iron
Colour	embossed white RAL 9003
Processing	Coating



Pendant Luminaires | 220-240 V | topLED 12 W 700 mA | CRI 90  
**8647**

Single emission pendant luminaires for indoor application. The warm white LED light source with a flood light distribution is composed of 6 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 1252 lm, with a 104.3 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The device body is made of aluminium and features a copper finish, processed by means of electroplating; the diffuser is made of PC; the mounting frame is made of iron, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP20; The power supply driver is included in the delivery.

The total absorbed power is 12 W.


The device features protection class I and can be ceiling-mounted.

#### **Illuminotechnical Features**

Luminous flux (source)	1252 lm
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra



2Nights\_P6 | Pendant Luminaires | Accessories  
8647



Dimmer  
PUSH DIM, 220-240V

**Code**  
KIT0026



Dimmer  
Bluetooth, 85-240V

**Code**  
KIT0080