

ZERO - A03521.050.0101

Team Design 2012

Ceiling or wall lighting fixture for interiors, with direct light emission.

Pickled sheet metal structure in matt white polyacrylic paint or with gold leaf coating, or in polished stainless steel.

Specular aluminium reflector.

Cover in brass with matt white polyacrylic paint, with gold leaf coating or with galvanic chrome plating.

Extruded polycarbonate diffuser with opaline finish.

DATA SHEET

Code	A03521.050.0101
System power consumption	11W
Efficacy	63.64lm/W
Light source	LED
Colour temperature	3000K Ra >80
Light distribution	diffused
Power supply	220-240V AC
Frequency	50/60Hz
Electrical configuration	ON-OFF
Driver	integrated included
Nominal luminous flux	1075lm
Lumen output	700lm
Efficiency	65.116%
Weight	1,3650Kg
Protection degree	IP20
Packing dimensions (cm)	10 x 84 x 7



Colour

gold leaf





TECHNICAL DRAWING





DIAGRAMMA POLARE



cd/klm
 — C0 - C180 — C90 - C270

$\eta = 100\%$

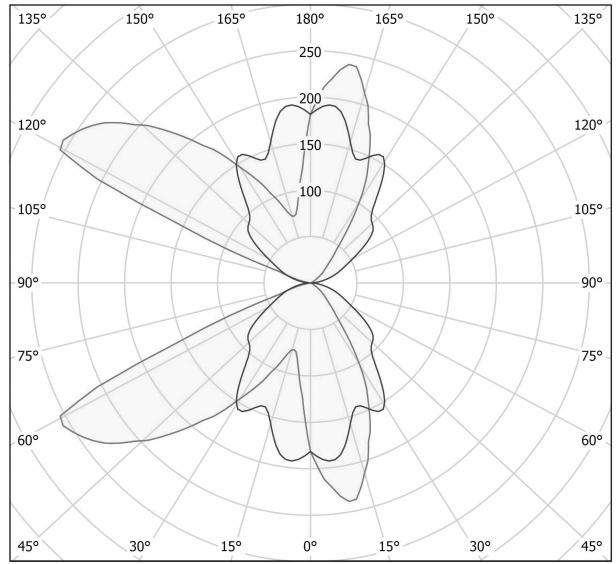