

# GIANO - A24646.150.0101

## Studio Tecnico Panzeri 2017

Wall lighting fixture for interiors, with direct and indirect light emission.

Extruded aluminium structure in RAL 9003 white or black powder paint.

Extruded polycarbonate diffusers with opaline finish or micro-prismatic.


Pickled sheet metal end caps in polyacrylic paint.

Equipped with wiring for separate switches for direct only, indirect only or direct and indirect light emission.

## DATA SHEET



Code	A24646.150.0101
System power consumption	77W
Efficacy	58.14lm/W
Light source	LED
Light source lifetime	L80 (B20) 60'000h
Colour temperature	3000K Ra >80
Light distribution	diffused
Apertura fascio	64° / 87°
Power supply	220-240V AC
Frequency	50/60Hz
Electrical configuration	ON-OFF
Driver	integrated included
Nominal luminous flux	9120lm
Lumen output	4477lm
Efficiency	49.090%
Weight	3,6240Kg
Protection degree	IP40
Colour tollerances	SDCM 3
Packing dimensions (cm)	14 x 180 x 14

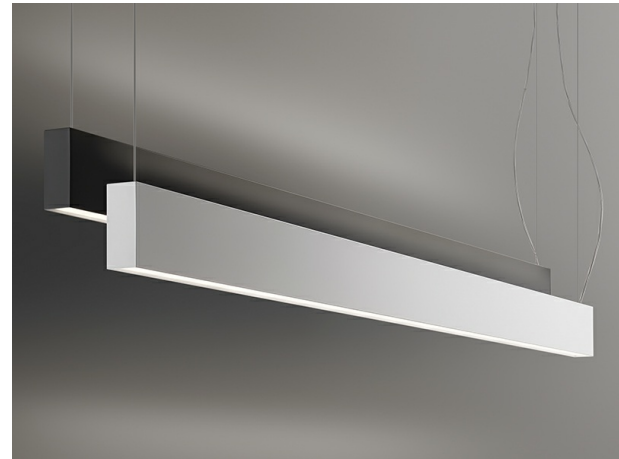

Colour

matt white/opal screen



## ACCESSORIES

**XM002.050.0110**  
LED module, 500mm (19,7") 49 LED 12W 24V DC 3000K Ra>80 1520lm.  
LED | 24W/m | 3000K Ra >80  
24V DC

**XM002.007.0110**  
LED module, 72mm (2,8") 7 LED 1,7W 24V DC 3000K Ra>80 217lm.  
LED | 24W/m | 3000K Ra >80  
24V DC

**XM1ROWHD/5MT**  
Strip LED, 5000mm (196,9") 168 LED/m 17W/m 24V DC 3000K Ra>80 1590lm/m,  
to be cut each 42mm (1,7").  
LED | 17W/m | 3000K Ra >80  
24V DC

**XM246-U**  
Linear junction kit.

**XM246-ALU CUT**

Extruded aluminum cut on request.

*XM246-SCREEN CUT*

Polycarbonate screen cut on request.

*XM2038/46-3*

Power supply kit with white canopy and 3 pole power cable with length 2,2m (86,6").

*XM2038/46-5*

Power supply kit with white canopy and 5 pole power cable with length 2,2m (86,6").

*XM2033/34/45/46-1200S*

Extruded polycarbonate diffuser with opaline finish, 1200mm (47,2") long.

*XM2033/34/45/46-600S*

Extruded polycarbonate diffuser with opaline finish, 600mm (23,6") long.

*XM2033/34/45/46-900S*

Extruded polycarbonate diffuser with opaline finish, 900mm (35,4") long.

*XM2033/34/46-370S PR*

Micro-prismatic extruded polycarbonate diffuser, 3700mm (145,7") long.



# TECHNICAL DRAWING



# DIAGRAMMA POLARE

