


APP-LIQUES

App-eal 2

code APEB2

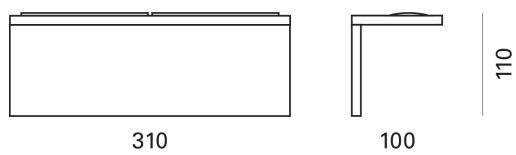


PRODUCT DESCRIPTION

Wall-mounted fixtures for indirect diffused lighting. Complete with 230V/240V professional linear LED sources. App-line, a little shelf with indirect lighting emission. App-eal "L" shaped with direct lighting emission. Body in painted milled aluminium. Optical group complete with frosted screen. Degree of protection IP40.

PRODUCT FEATURES

Mounting method	wall
Lamps	LED 230V
Wattage	2x13W
Color temperature	4000K
Color rendering index	>80
Optics	110°
Finishing	white
Source luminous flux	2000lm
Luminous flux	1920 lm
Fitting efficiency	74 lm/W
Chromaticity tolerance (initial	3
Estimated average life expectancy	50000h L70 B10 ta
	25°C
Ballast	included
Mains voltage	220-240V / 50-60Hz
Weight	1,5 Kg
Dimension	100x310 H 110 MM
Grado IP	IP40
	No

Dimmable with phase cut dimmer dedicated
Vimar EvoEikon or equivalent

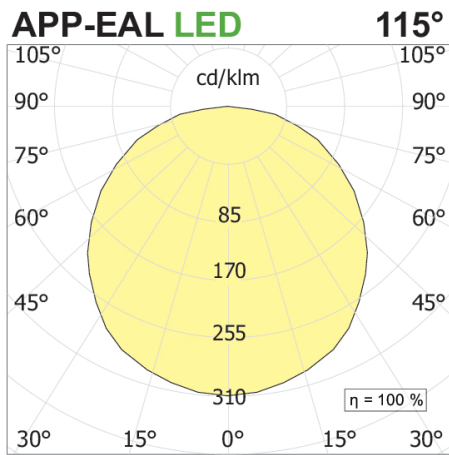

EN605981 compliant

Ci riserviamo la possibilità di apportare modifiche ai nostri prodotti in qualsiasi momento. I dati aggiornati sono disponibili all'indirizzo www.luciferos.it - We reserve the right to change our products at any time. Current information is available at www.luciferos.it - En tous moment nous reservons le droit de modifier notre produits. Vous pouvez trouver la information actuelle toujours a www.luciferos.it - Wir behalten uns vor, jederzeit Änderungen an unserem Produkten vorzunehmen. Actuelle daten stellen wir jederzeit unter www.luciferos.it zur Verfügung - Nos reservamos en todo momento el derecho de realizar cambios en nuestros productos. En nuestra pagina www.luciferos.it siempre se encontrarán datos actuales.

Lucifero's srl - via del Tappeziere,3 - 40138 Bologna - Italia - ph. +39 051 6014276 - assistenza@luciferos.it - customercare@luciferos.it