


## ICEMENTI

Floor cento3cento

code IC0101.840

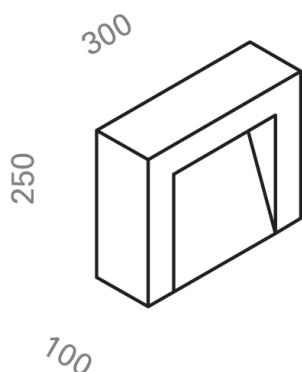

### PRODUCT DESCRIPTION

LED floor appliance, for directional and guidance lighting, fitted with unilateral asymmetrical emission with an inclination of 20° respect to the vertical axis. Body in CementoPioma, lightweight fiber concrete, with "smoothed concrete" hand-crafted finishing. Aluminium optical unit complete with 4W LED source (360 lumens fed at 500mA), 50/60Hz 120/240V built-in electronic driver, asymmetrical emission lens and steel mounting plate for fixing to the ground, with anti-theft system. Degree of protection IP65

### PRODUCT FEATURES

Mounting method	floor
Wattage	1x3W
Color rendering index	80
Optics	22°
Source luminous flux	290lm
Luminous flux	75 lm
Fitting efficiency	25 lm/W
Ballast	included
Energy efficiency class	A+
Weight	7,75 Kg
Dimension	100x300 H 250 MM
Grado IP	IP65
	No

EN605981 compliant