


ICEMENTI

Ceiling zero51

code IC0701.830D

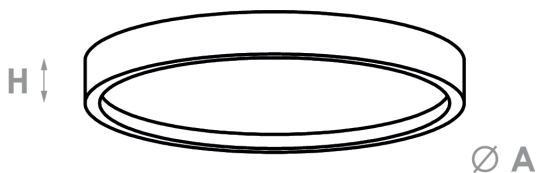


PRODUCT DESCRIPTION

Ceiling appliance for direct diffused interior lighting, for LED source lamps. Body in CementoPiuma, lightweight fiber concrete, with "smoothed concrete" hand-crafted finishing. Diffusing screen in white opaline PMMA, built-in electronic driver 50/60Hz 230/240V and steel mounting plate for fixture to the ceiling. Maintenance by removing the diffuser without the use of tools. Degree of protection IP40.

PRODUCT FEATURES

Mounting method	ceiling
Lamps	LED
Wattage	48W
Color temperature	3000K
Color rendering index	80
Source luminous flux	3358lm
Luminous flux	3358 lm
Fitting efficiency	70 lm/W
Ballast	included
Dimmable	dali touch & dim
Mains voltage	220-240V / 50-60Hz
Energy efficiency class	A+
Weight	17 Kg
Dimension	H 150 MM D 700 MM
Grado IP	IP30
	No

ZERO51 LED

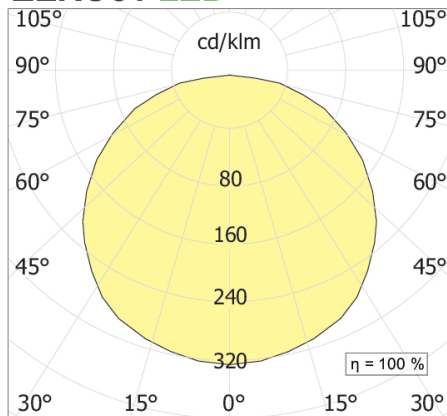

EN605981 compliant

Ci riserviamo la possibilità di apportare modifiche ai nostri prodotti in qualsiasi momento. I dati aggiornati sono disponibili all'indirizzo www.luciferos.it - We reserve the right to change our products at any time. Current information is available at www.luciferos.it - En tous moment nous reservons le droit de modifier notre produits. Vous pouvez trouver la information actuelle toujours a www.luciferos.it - Wir behalten uns vor, jederzeit Änderungen an unserm Produkten vorzunehmen. Actuelle daten stellen wir jederzeit unter www.luciferos.it zur Verfügung - Nos reservamos en todo momento el derecho de realizar cambios en nuestros productos. En nuestra pagina www.luciferos.it siempre se encontrarán datos actuales.

Lucifero's srl - via del Tappeziere,3 - 40138 Bologna - Italia - ph. +39 051 6014276 - assistenza@luciferos.it - customercare@luciferos.it