



SPBEL118
Design by Manuel Vivian

Collection consisting of suspended lamps with a metal frame covered with strips of extra smooth flame-retardant pongé fabric. Available in several colours and sizes.

Typology: SUSPENDED

Ratings


- Built in **LED** module
- CCT 3000 K
- Downlight and uplight
- Surface installation over holes
- Supply voltage ~220-240V
- Switch mode: on-off
- Dimmable DALI LED driver
- Steel frame
- Opalescent diffuser

Product code composition

BELL / diffuser INCLUDED, with upward and downward lighting

Type	Article	Colours	Finish	Source
SP	BEL 118 LED	BC white	XX	LED 95W - diffused beam 3000K
		BL electric blue		
		BW warm white		
		GI gold yellow		
		MA brown		
		MT brick red		
		NE black		
		RB burgundy		
		RS red		
		VE green		

kg 16.5 m³ 1.9

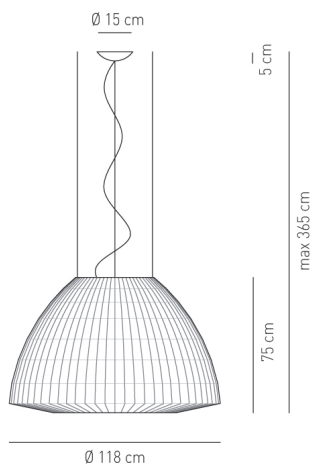

CE IP20 CRI90 **LED** 6490 lm 68 lm/W

example composition code | SP | BEL118LED | BW | XX

Available colors



EELc (Energy Efficiency Label compatibility) contain built in LED lamps that cannot be changed: A, A+, A++

CUSTOMER _____ NOTES _____

SPBEL118LED_XX _____

NOTICE:
Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is estimated based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.