



E 2 101 1 XX
Design by Manuel Vivian

Collection consisting of suspended lamps in aluminium, also in a recessed version. Available in several colours.


Typology: SUSPENSION LAMP

Ratings

- Built in **LED** module
- CCT 3000 K
- Downlight
- Surface installation over holes
- Supply voltage ~220-240V
- Switch mode: on-off dimmable Push
- Extruded aluminium stick, painted
- Lens+diffuser

Product code composition

VIRTUS / LED 3W

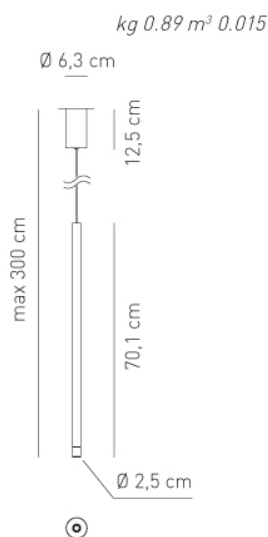

| Zone | Type | Article | System compatibility | Finish | LED colour temperature | Beam options |
|------|------|---------|-----------------------------|---|------------------------|----------------|
| E | 2 | 101 | 1 monopoint canopy version | 07 wrinkled white RAL 9016 | 1 3000 K | 2 medium beam |
| | | | | 10 anthracite grey wrinkled-final black polished nickel | | |
| | | | | 11 anthracite grey wrinkled-final polished gold | | |
| | | | | 12 rust brown wrinkled-final black polished nickel | | |
| | | | | 13 rust brown wrinkled-final polished gold | | |

CE IP20 CRI90 **LED** ~184 lm 61 lm/W

example composition code | E | 2 | 101 | 1 | 11 | 1 | 2

for optional accessories please refer to our pricelist or contact our representatives

Available colors



07
wrinkled white
RAL 9016



10
anthracite grey
wrinkled - final
black polished nickel



11
anthracite grey
wrinkled - final
polished gold



12
rust brown wrinkled
final black
polished nickel



13
rust brown wrinkled
final polished
gold

EELc (Energy Efficiency Label compatibility) contain built in LED lamps that cannot be changed: A, A+, A++

E21011_ _12

CUSTOMER _____

NOTES _____

NOTICE:
Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is estimated based on nominal ratings of the LED sources.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.