


lighting design

FLORA L | LED

CE | Ⓢ | Ⓜ | EN 60598-2-3 | IP 65 | 220V – 240V / 50Hz – 60Hz



- total height: 7.37m
- light standards: low lighting requirements
- lamp: incl. TAB-LL3 LED module
- colour temperature: 3.000K warm white or 4.000K neutral white
- LED gear: electronic driver, up to 85,000 hours/ B10; driver with integrated Constant Light Output (CLO) in order to keep the luminous flux the same over the entire life time
- LED life expectancy: up to 50,000 hours/ L 70/ B 10
- light control: at extra cost: dimming
- optical system: diffuse
- light distribution: indirect, symmetrical
- luminaire head: cast aluminium, stainless steel; leaf construction made of hot-dip galvanised steel; powder coated; incl. awning cloth in read
- column: twice bent tapered pole; made of hot dip galvanised steel; powder coated
- colour: RAL 6017
- glazing: flat, clear toughened glass glazing
- wiring: completely wired, incl. cable until access door
- installation: with root to be set into the ground
- accessory: cable junction box – to be ordered separately
- application areas: fancy and close to nature luminaire for kindergardens, parkways, boulevards, schools, hotels, home for elderly people, factory premises, special squaress

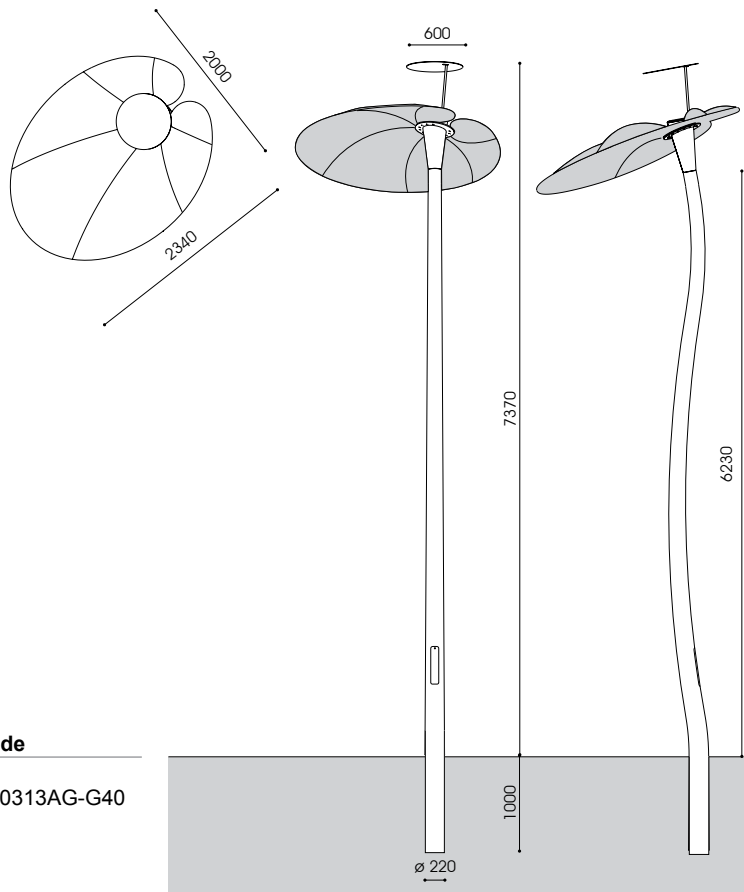

lamp	kg	product code
TAB-LL3 LED 23,5W/2.369lm/3.000K	280,0	6.111.9126.0313AG-G40

class II – at extra cost (add "S" at the end)

Technical specifications are subject to change without notice. 03.2018