


## luminous column

**KORA NOVA L II**

CE | Ⓢ | □ | EN 60598-2-3 | IP 65 | 230V / 50Hz

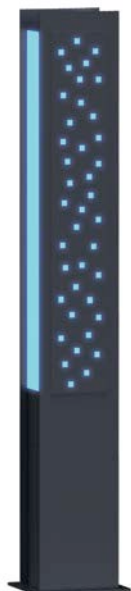

total height:	2.50m (other heights on request)
light standards:	low lighting requirements
lamp:	excl. fluorescent lamp
gear:	incl. electronic ballast
light control:	at extra cost: dimming
optical system:	vertically mounted lamp, diffuse
light distribution:	4 windows; 2 windows are perforated
luminaire body:	rectangular, made of hot dip galvanised steel with 1 door for cable junction box; powder coated; on request with individual city or company names or other logos available
colour:	RAL or DB
glazing:	polycarbonate, opal, impact resistant, UVstabilised
	wiring: completely wired; incl. cable until access door
installation:	with flange plate to be screwed on a concrete foundation on site or on an additional bolt-on root
accessory:	lamp, cable junction box and bolt-on root with screws – to be ordered separately
application areas:	atmospheric light in front of prestigious buildings, eye catcher for hotels, resorts, schools, home for elderly people, factory premises, squares or for boulevards

lamp	socket	kg	product code
1 x LS 58W	G13	78,0	9.824.4407.00
<b>accessory – to be ordered separately</b>			
bolt-on root - hot dip galvanised steel			
<b>R430/380/800</b>		15,5	9.900.0020.43

class II – at extra cost (add "S" at the end)

Technical specifications are subject to change without notice. 10.2016

