


bollard

KORA NOVA P I

CE | Ⓢ | Ⓜ | EN 60598-2-3 | IP 65 | 230V / 50Hz

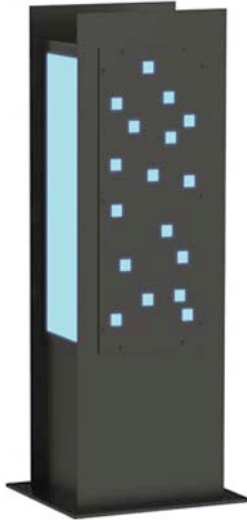

- total height: 1.10m (other heights on request)
- light standards: low lighting requirements
- lamp: excl. fluorescent lampen
- gear: incl. electronic ballasts
- light control: at extra cost: dimming
- optical system: vertically mounted lamp, diffuse
- light distribution: 4 windows; 2 windows are perforated
- luminaire body: rectangular, made of hot dip galvanised steel with 1 access door for cable junction box; powder coated; on request with individual city or company names or other logos available
- colour: RAL or DB
- glazing: polycarbonate, opal, impact resistant, UVstabilised
- wiring: completely wired; incl. cable until access door
- installation: with flange plate to be screwed on a concrete foundation on site or on an additional bolt-on root
- accessory: lamp, cable junction box and bolt-on root with screws – to be ordered separately
- application areas: atmospheric light in front of prestigious buildings, eye catcher for hotels, resorts, schools, home for elderly people, factory premises, squares or for boulevards

lamp	socket	kg	product code
2 x LS 18W	G13	25,0	9.824.4317.00
accessory – to be ordered separately			
bolt-on root - hot dip galvanised steel			
R430/380/800		15,5	9.900.0020.43

class II – at extra cost (add "S" at the end)

Technical specifications are subject to change without notice. 10.2016

