

GOLDEN RING - L08102.300.0102

Enzo Panzeri 2015

Suspension lighting fixture for interiors, with direct and indirect light emission.

Pickled sheet metal structure in polyacrylic paint.

Aluminium dissipation plates.

Aluminium and pickled sheet metal covers in matt white, black or bronze polyacrylic paint, or with gold leaf coating.

Diffusers in modelled polycarbonate with opaline finish.

Suspension kit with griplocks and 5m (196,9") long steel cables.

5m (196,9") long power cable in transparent PVC.


Power canopy with galvanized sheet metal ceiling bracket and pickled sheet metal covering in matt white, black or bronze polyacrylic paint, or with gold leaf coating.




DATA SHEET



| | |
|--|--------------------------|
| Code | L08102.300.0102 |
| System power consumption | 398W |
| Efficacy | 73.68lm/W |
| Light source | LED |
| Light source lifetime | L80 (B20) 60'000h |
| Colour temperature | 3000K Ra >80 |
| Light distribution | diffused |
| Power supply | 220-240V AC |
| Frequency | 50/60Hz |
| Electrical configuration | dimmable (DALI/Push DIM) |
| Driver | integrated included |
| Nominal luminous flux | 52200lm |
| Lumen output | 29326lm |
| Efficiency | 56.180% |
| Weight | 41,4800Kg |
| Protection degree | IP40 |
| Resistenza alla prova del filo incandescente | 850° |
| Colour tollerances | SDCM 3 |
| Packing dimensions (cm) | 312 x 40 x 180 |

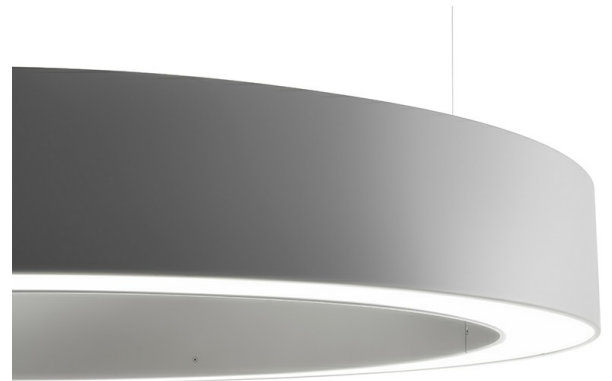

 Colour
black



ACCESSORIO

M8102-6 - black
Canopy for power supply and to join 6 steel cables.

 TECHNICAL DRAWING


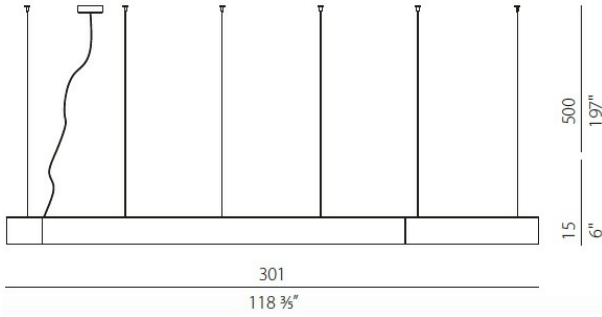


 DIAGRAMMA POLARE

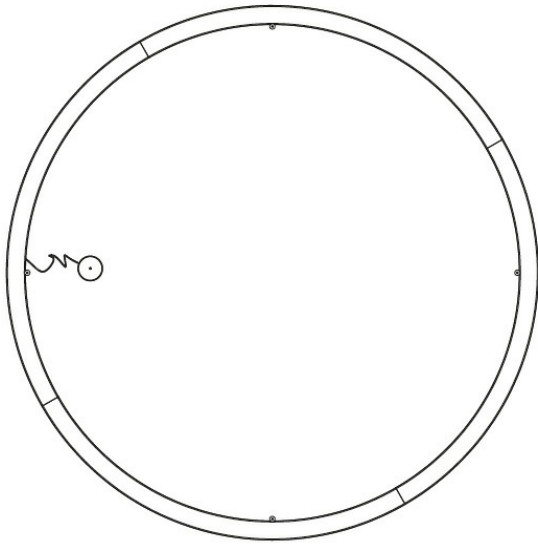