

GOLDEN RING - L08121.300.0102

Enzo Panzeri 2015

Suspension lighting fixture for interiors, with direct and indirect light emission.

Pickled sheet metal structure in polyacrylic paint.

Aluminium dissipation plates.

Aluminium and pickled sheet metal covers in matt white, black or bronze polyacrylic paint, or with gold leaf coating.

Diffusers in modelled polycarbonate with opaline finish.

Suspension kit with griplocks and 5m (196,9") long steel cables.

5m (196,9") long power cable in transparent PVC.


Power canopy with galvanized sheet metal ceiling bracket and pickled sheet metal covering in matt white, black or bronze polyacrylic paint, or with gold leaf coating.



DATA SHEET



Code	L08121.300.0102
System power consumption	398W
Efficacy	73.68lm/W
Light source	LED
Light source lifetime	L80 (B20) 60'000h
Colour temperature	3000K Ra >80
Light distribution	diffused
Power supply	220-240V AC
Frequency	50/60Hz
Electrical configuration	dimmable (DALI/Push DIM)
Driver	integrated included
Nominal luminous flux	52200lm
Lumen output	29326lm
Efficiency	56.180%
Weight	41,4800Kg
Protection degree	IP40
Resistenza alla prova del filo incandescente	850°
Colour tollerances	SDCM 3
Packing dimensions (cm)	312 x 40 x 180

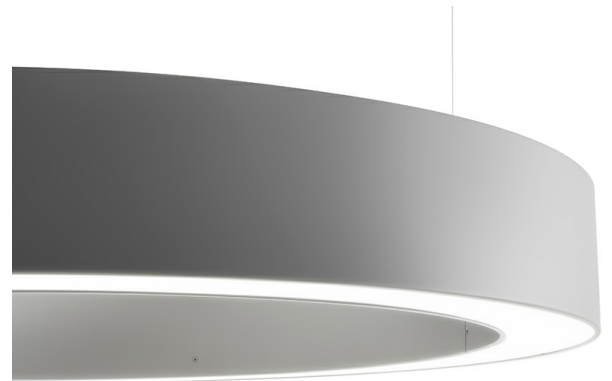

Colour

gold leaf



ACCESSORIO

M8121-6 - gold leaf
Canopy for power supply and to join 6 steel cables.

 TECHNICAL DRAWING


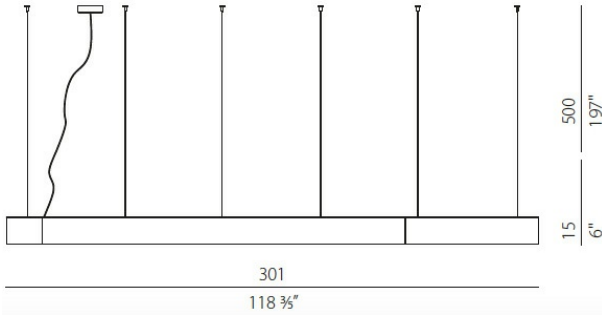


 DIAGRAMMA POLARE

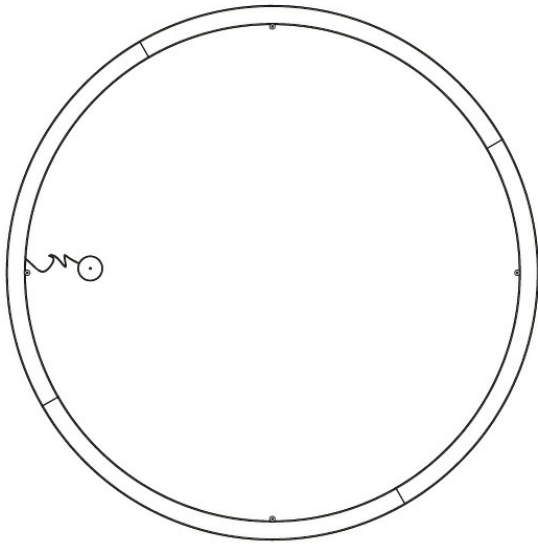