


the grass

# LILLI L I LED

# LILLI L II LED



- total height: 3.70m / 5.70m
- light standards: for low and medium lighting requirements
- lamp: incl. 1 or 2 glare-free LLM LED module(s), easy to replace  
LILLI L II: 1.800lm at the top and 1.100lm at the bottom
- colour temperature: 3.000K warm white or 4.000K neutral white
- LED gear: electronic driver, up to 100.000 hours; driver with integrated Constant Light Output (CLO) in order to keep the luminous flux the same over the entire life time
- LED life expectancy: up to 50.000 hours/ L100 for minimum maintenance costs due to an excellent thermal management
- light control: at extra cost: power reduction or dimming
- optical system: reflector system for LLM LED modules, diffuse
- light distribution: asymmetrical wide beam
- luminaire body: tapered bent pole, made of hot dip galvanised steel with top made of cast aluminium, powder coated; with 2 or 3 access doors for cable junction box and drivers
- colour: RAL or DB
- glazing: in dewdrop shape made of PMMA RESIST, opal, high-impact resistant
- wiring: completely wired, incl. cable until access door
- installation: with root to be set into the ground
- accessory: cable, cable junction box – to be ordered separately
- application areas: luminaire in line with nature for parkways, boulevards, schools, home for elderly people, resorts, hotels, factory premises, paths, squares, car parks

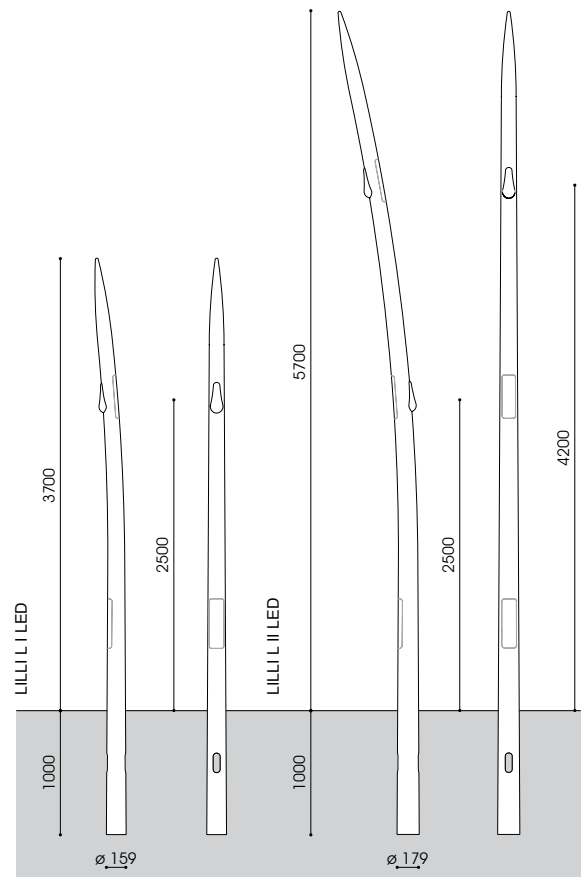

lamp	kg	product code
<b>LILLI L I LED – 3,70m</b>		
LLM LED 9W/1.100lm/3.000K	60,0	9.956.0138.70
<b>LILLI L II LED – 5,70m</b>		
LLM LED 16W/1.800lm/3.000K + LLM LED 9W/1.100lm/3.000K	93,0	9.956.0118.70
dim settings according to customer's request with programmable driver		x.xxx.xxxx.xx-93

class II – at extra cost (add "S" at the end)

Technical specifications are subject to change without notice. 04.2017