




**FO95132-4B CL8\_24WW**

BLK/GLD

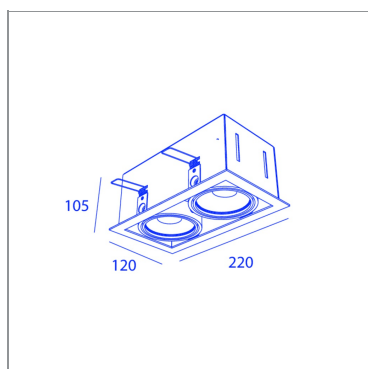

FO95132-4B CL8\_24WW



### SPECIFICATIONS

CUT-OUT SIZE	205 x 110mm
MIN RECESSED HEIGHT	120mm
WEIGHT	1.4kg
INGRESS PROTECTION (IP)	IP20, IP20 inside ceiling
GLOW WIRE TEST	850°C

### LIGHT SPECIFICATIONS

LIGHT SOURCES	1
BEAM ANGLE	24°
COLOR TEMPERATURE	2700K
CRI	90
LIGHT SOURCE POWER (1 LUMINAIRE)	10W
LIGHT SOURCE OUTPUT	1440LM
LUMINAIRE PERFORMANCE	MAX800LM

### POWER SPECS

GEAR TRANSFO	included
LAMP POWER	10W
DIMMABLE	1-10V/PUSH/DALI DIMMABLE

### COMPLEMENTARY OPTIONS

- BB20200 BB20200 - CONCRETE BOX 2L CONCRETE BOX 2L
- BS0298 HONEYCOMB D50
- BS0383 SQUARE OPTIC
- BS0384 LINEAR SPREAD LENS

### REMARKS

! 15° or 38° or 60° beam angle on request > ref=...\_15 or ...\_38 or ...\_60