## **U-LIGHT** – PL UL X 180 - recessed – technical sheet





PLUL1180 - recessed PLUL2180 - recessed Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminium.

Available in several colours and sizes.

Available with sound absorbing panel option.


Typology: WALL, CEILING LAMP

## Ratings


- •Built in LED module
- •CCT 3000 K or 2700K
- •Wallward light (wall), downlight or uplight (ceiling)
- ·Surface installation over holes (legs) and in Ceiling cut-out (recessed canopy)
- Supply voltage 24VDC
- ·Switch mode: on-off
- •Painted aluminium profile 23 x 23 mm
- Opalescent diffuser

Product code composition


## PL UL 1: kg 5,7 m3 0.310 PL UL 2: kg 6,1 m3 0.310




rosone incasso / recessed canopy hole Ø 4,5 cm



altezze disponibili available heights



U-LIGHT / h10 cm or h25 cm recessed ceiling lamp / DRIVER NOT INCLUDED

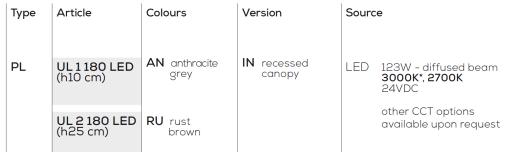







24Vpc

foro - hole Ø 4,5 cm / profondità min - min depth 10 cm

Installazione come plafoniera (downlight o uplight) oppure applique (con illuminazione verso la superficie di installazione). Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).

- -for optional drivers or dimming technology please refer to our pricelist or contact our representatives
- -sound absorbing option upon request- for more information see www.axolight.eu/u-light/u-light-sound-absorbing.pdf

Available colors



AN Anthracite



RU Rust brown



Sound absorbing option upon request

EELc (Energy Efficiency Label compatibility) contain built in LED lamps that cannot be changed: A, A+, A++

**CUSTOMER** 

**NOTES** 

PLUL 180LED IN

Luminous flux (Im) and efficacy (Im/W) for all built-in LED luminaires is based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.