




Job Name:

Contact:

Ordering Code:

Fixture Type:

Pandora

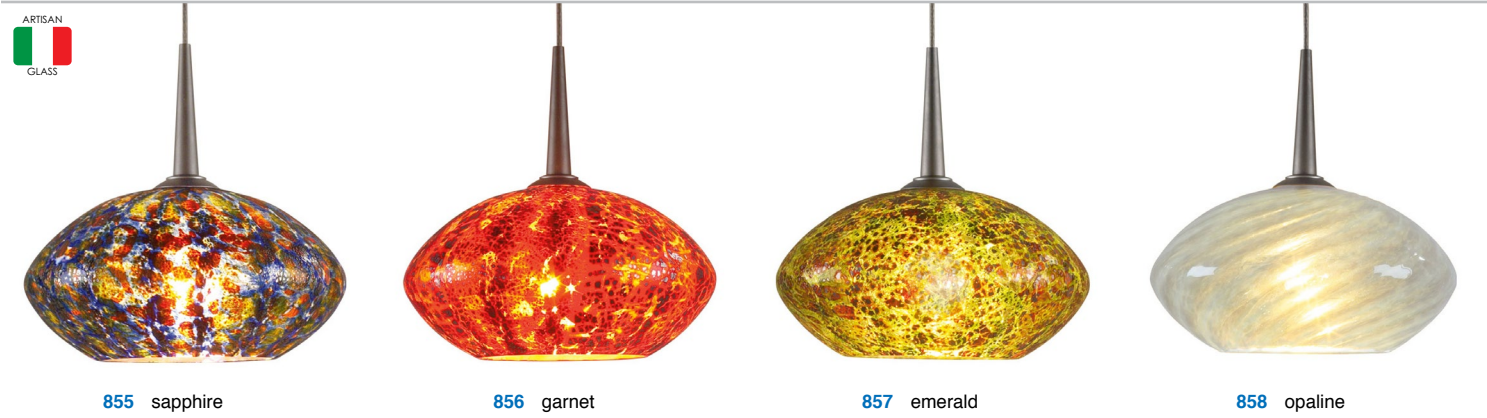

Description

Bruck's European and American Artisan, mouth-blown glass is known throughout the world for its quality and beauty. Several light source options, mounting options, colors and finishes allow for a unique design. Most of Bruck's mini-pendant glass allows for easy screw-on / screw-off for a simple installation.

Standard cable length is 59". Overall cable length is measured and begins from uni-plug or top of mono-point. For the track adapters, overall cable length begins at the shoulder of the ECO/GEO adapter and the track center of the Zoryx adapter. Cable length measurement ends at the top of glass or to the mounting arms.

Ordering Codes

Follow the steps to specify your fixture,

example:

1 Light Source	2 Shade Color	3 Finish	4 Mounting Option
223 400 lm LED 221 low voltage	855 sapphire 856 garnet 857 emerald 858 opaline	bz bronze ch chrome mc matte chrome	MP 4" Canopy UNI12 Uni-Plug 12 MULTI LED multi-point

NOTES:

1. 221 for MP and UNI12 mounting only




Job Name:

Contact:

Ordering Code:

Fixture Type:

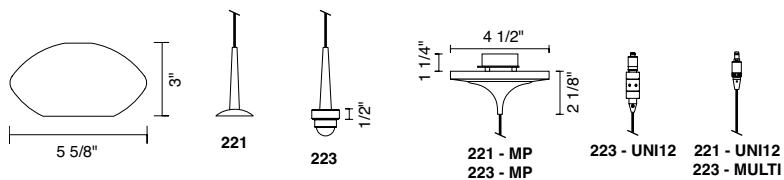

Light Source **223 - LED** **221 - low voltage (Bi-Pin)**

Performance

<p>LED</p> <p>LUMEN</p> <p>CCT</p> <p>SDCM</p> <p>CRI</p> <p>LIFE</p>	<ul style="list-style-type: none"> • Cree XTE • 400 lm • 2800k • 3 MacAdam Ellipse, +/-75 Kelvin • 90 min. • based on IESNA-LM80-2008: 90% of initial lumens after 60,500 hrs 	<ul style="list-style-type: none"> • lamp dependent
---	---	--

Technical Specs

<p>Socket Listing</p>	<ul style="list-style-type: none"> • integrated LED module • ETLus Listed to UL1598, UL1574 and UL2108 (Suitable for dry locations only) • cETL Listed to CSA C22.2 #250.0 and #9.0 	<ul style="list-style-type: none"> • GY6.35 socket • ETLus Listed to UL1598, UL1574 and UL2108 (Suitable for dry locations only) • cETL Listed to CSA C22.2 #250.0 and #9.0
-----------------------	--	--

Mounting

<p>Uni-Plug UNI12</p>	<ul style="list-style-type: none"> • 12V AC input • 9W, 11.3VA • Dimmable 	<ul style="list-style-type: none"> • 12V AC/DC input • 50W, 50VA (max 50W lamp) • Dimmable • Connects to Uni-Light system with appropriate low voltage adapter (V/A, Enzis, High-Line) or line voltage adapter (ECO, GEO, Zonyx)
<p>4" Canopy</p>	<ul style="list-style-type: none"> • 120-277 50/60Hz input • 8W, 8VA • Dimmable: <ul style="list-style-type: none"> • ELV (Reverse Phase) • Mount to 3 1/2" - 4" round J-Box • Short circuit protection • Thermal protection 	<ul style="list-style-type: none"> • 120VAC 50/60Hz input • 11.7V AC output 49W, 50VA (max 50W lamp) • Dimmable (Trailing Edge ELV) • Mount to 3 1/2" - 4" round J-Box • Short circuit protection • Overload protection • Thermal protection
<p>MULTI</p>	<ul style="list-style-type: none"> • 700mA constant current input • 6.3W • Mounts to low voltage LED multi-point canopy • Dimmable, refer to low voltage LED canopy spec sheet 	

Warranty

<ul style="list-style-type: none"> • 5 year limited fixture warranty 	<ul style="list-style-type: none"> • 1 year limited fixture warranty
---	---



Made in the USA - meets the requirements of the Buy American provision within the ARRA