










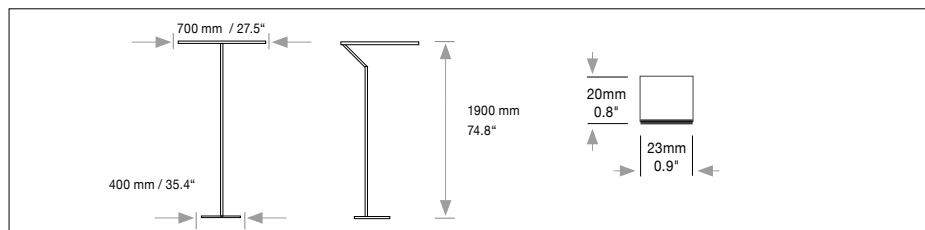






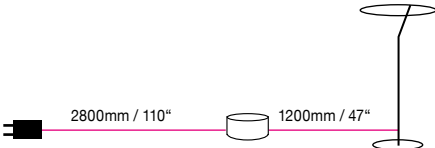
SATTLER


INSOSPESO FLOOR

Housing: Aluminium profile with integrated acrylic cover. Round lamp stand made of glass with satinised sides.

Design: JÜRGEN BECKERT



	Size: Ø mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version	
Sizes	Ø 700, H 1900 mm	Ø 27.5 H 74.8"	40	2.017	7 / 15.4	597.	x x.	x x.	x x.	x x.	x x x.	x	
LED		Warm-white	3000 K	(Standard)	x x x.	63.	x x.	x x.	x x.	x x x.	x		
24V		Neutral-white	4000 K	(Optional)	x x x.	69.	x x.	x x.	x x.	x x x.	x		
CRI > 90		Extra warm-white	2700 K	(Optional)	x x x.	61.	x x.	x x.	x x.	x x x.	x		
CRI > 80		Extra warm-white	2200 K	(Optional)	x x x.	22.	x x.	x x.	x x.	x x x.	x		
Dimming		With Touchdimmer	(Standard)			x x x.	x x.	21.	00.	x x.	x x x.	x	
Finishes	 11 white	(Optional)	 10 black fine textured	 22 aluminium polished	 30 anthracite	 32 crocodile black	 33 sand silver fine textured						
			 35 gold	 36 brass	 37 bronze fine textured	 38 copper							
						 XX Custom finish	x x x.	x x.	x x.	x x.	 . .	x x x.	x
Power Supply Cable	 Z 91 PVC cable transparent 4000 mm / 157"	 2800mm / 110" 1200mm / 47"					x x x.	x x.	x x.	x x.	x x.	Z91.	x



Round lamp stand made of glass with satinised side.



Power supply unit with power switch matching in finish colour, with wall plug.

Contact factory for other finishes

597.	x x.	21.	00.	x x.	Z91.	N
-------------	------	------------	------------	------	-------------	----------

Complete order number

Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08



Protective rating



Light distribution direct



Protection class III:
only suitable for very low
voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.