


SATTLER

INSOSPESO PENDANT

Housing: Circular aluminium profile with integrated acrylic cover, and canopy.
Design: JÜRGEN BECKERT

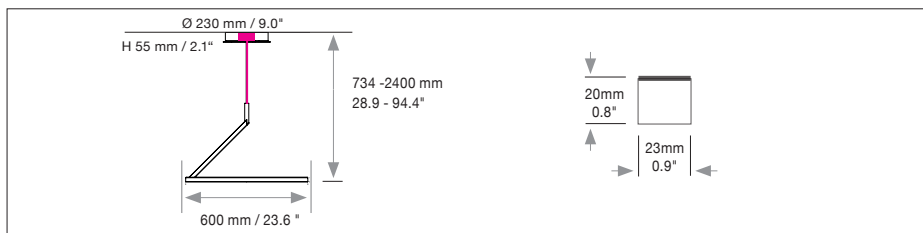

Size: Ø mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version								
Sizes	Ø 600 mm	23.6"	33	1.557	3.0 / 6.6	595.	X X.	X X.	X X.	X X.	X X X.	F							
LED 24V CRI > 90 *CRI > 80		Warm-white	3000 K	(Standard)	X X X.	63.	X X.	X X.	X X.	X X X.	X								
		Neutral-white	4000 K	(Optional)	X X X.	69.	X X.	X X.	X X.	X X X.	X								
		Extra warm-white	2700 K	(Optional)	X X X.	61.	X X.	X X.	X X.	X X X.	X								
		Extra warm-white	2200 K*	(Optional)	X X X.	22.	X X.	X X.	X X.	X X X.	X								
Dimming		Without Dimmer		(Standard)	X X X.	X X.	01.	00.	X X.	X X X.	X								
		DMX		(Optional)	X X X.	X X.	31.	00.	X X.	X X X.	X								
		Dimmable 1 - 10 V		(Optional)	X X X.	X X.	41.	00.	X X.	X X X.	X								
		Dimmable 0 - 10 V		(Optional)	X X X.	X X.	51.	00.	X X.	X X X.	X								
		Dimmable DALI		(Optional)	X X X.	X X.	61.	00.	X X.	X X X.	X								
		Dimmable CASAMBI		(Optional)	X X X.	X X.	81.	00.	X X.	X X X.	X								
		Bluetooth 4.0 remote control through app.			X X X.	X X.	91.	00.	X X.	X X X.	X								
		ENOCEAN wireless push button		(Optional)	X X X.	X X.	91.	00.	X X.	X X X.	X								
Finishes																			
(Standard)	11 white	(Optional)	22 aluminium polished	30 anthracite	27 brush-finished aluminium	32 crocodile black	33 sand silver fine textured	35 gold	36 brass	37 bronze fine textured	38 copper	10 black fine textured	XX Custom finish						
													X X X.	X X.	X X.	X X.	X X.	X X X.	X
Power Supply Cable		Z 70																	
(Standard)		Z 70 Silver											X X X.	X X.	X X.	X X.	X X.	Z70.	F



595.	X X.	X X.	X X.	X X.	Z70.	F
-------------	------	------	------	------	-------------	----------

Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**

Complete order number

Optional



CASAMBI wall-switch

207. 00. 00. 00. 11 (white)
207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lamps together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08

IP 20 Protective rating



Light distribution indirect



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

www.sattler-lighting.com

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. 2) Weight of lights without remote technical unit or canopy.