


SATTLER

TRIS

Housing: Aluminium profile with acrylic cover on the inside
 Design: JÜRGEN BECKERT

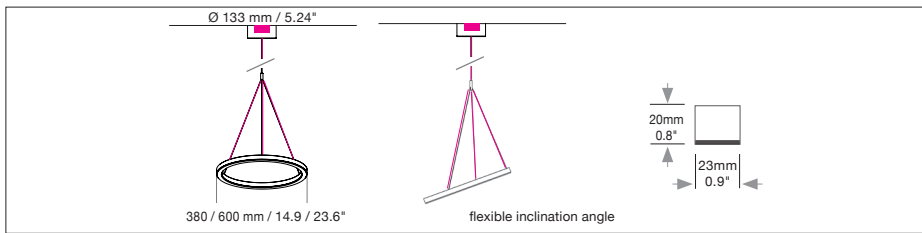

Size: Ø mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	Finishes	Power Supply cable	Mounting Version
Ø 380 mm	14.9"	22	1.021	2.5 / 5.5	582.	X X.	X X. X X.	X X.	X X X.	X
Ø 600 mm	23.6"	33	1.768	3.0 / 6.6	583.	X X.	X X. X X.	X X.	X X X.	X

LED	LED Icon	Color	Temperature	Option	Item No.	LED	Dimming	Finishes	Power Supply cable	Mounting Version
24V		Warm-white	3000 K	(Standard)	X X X.	63.	X X. X X.	X X.	X X X.	X
CRI > 90		Neutral-white	4000 K	(Optional)	X X X.	69.	X X. X X.	X X.	X X X.	X
CRI > 80*		Extra warm-white	2700 K	(Optional)	X X X.	61.	X X. X X.	X X.	X X X.	
		Extra warm-white	2200 K*	(Optional)	X X X.	22.	X X. X X.	X X.	X X X.	X

Dimming	Dimming Icon	Option	Option	Item No.	LED	Dimming	Finishes	Power Supply cable	Mounting Version
		Without Dimmer	(Standard)	X X X.	X X.	01. 00.	X X.	X X X.	X
		Dimmable 1 - 10 V	(Optional)	X X X.	X X.	41. 00.	X X.	X X X.	X
		Dimmable 0 - 10 V	(Optional)	X X X.	X X.	51. 00.	X X.	X X X.	X
		Dimmable DALI	(Optional)	X X X.	X X.	61. 00.	X X.	X X X.	X
		Dimmable CASAMBI	(Optional)	X X X.	X X.	81. 00.	X X.	X X X.	X

Bluetooth 4.0 remote control through app.

Finishes	Finish 11	Finish 22	Finish 30	Finish 32	Finish 33	Finish 35	Finish 36	Finish 37	Finish 38	Finish 10	Finish XX	Item No.	LED	Dimming	Finishes	Power Supply cable	Mounting Version
(Standard)												X X X.	X X.	X X. X X.	X X.	X X X.	X
(Optional)		22 aluminium polished	30 anthracite	32 crocodile black	33 sand silver fine textured	35 gold	36 brass	37 bronze fine textured	38 copper	10 black fine textured	XX Custom finish	X X X.	X X.	X X. X X.	X X.	X X X.	X

Mounting Version	Mounting Version with 3 current-carrying steel cables length 2000mm	Mounting Version Icon	Option	Item No.	LED	Dimming	Finishes	Power Supply cable	Mounting Version
			(Standard)	X X X.	X X.	X X. X X.	X X.	X X X.	F

Dimensions of canopy

Type	Size mm / inch	For use with Mounting Version
DB 140	140 / 133 mm / 5.51 / 5.24"	F

Canopy finish same as housing finish

USA/Canada: Canopy mounts to 4" octagonal junction box.

X X X.	X X.	X X. X X.	X X.	000.	F
--------	------	-----------	------	-------------	----------

Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**

Complete order number

Optional CASAMBI wall-switch

207. 00. 00. 00. 11 (white)
207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.

	Handcrafted in Germany, certified quality		Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08		Protective rating		Light distribution direct		Protection class III: only suitable for very low voltage supply (<50V)		Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.
--	-------------------------------------------	--	----------------------------------------------------------------	--	-------------------	--	---------------------------	--	------------------------------------------------------------------------	--	--------------------------------------------------------------------------------------------------------------------------------------