



SP LIAI M 1

Design by Sara Moroni


Collection consisting of metal suspended lamps.
Available in several colours and sizes.
Built-in dimmable LED light source.

Typology: suspended

Ratings

- Built in **LED** module
- CCT 3000 K
- optic ~40° beam
- Surface installation over holes
- Supply voltage ~220-240V
- Switch mode: on-off
- Dimmable 0/1-10V

2.181Kg 0,9 m³

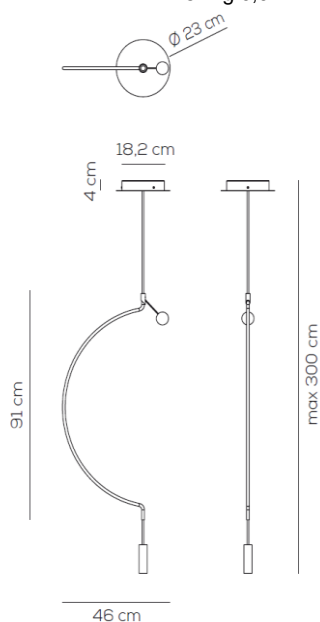

Product code composition

LIAISON / DRIVER INCLUDED

Type	Article	Arch/ Final & sphere finishes	Source
SP	LIAI M 1	NE black / NE black	LED 9W - optic ~ 40° beam 3000K*, 2700K
		NE black / OO matt gold	
		OO matt gold / NE black	



IP20 CRI>90 **LED** ~671lm* 75lm/W* 220-240Vac

example composition code **SP LIAI M 1 OO NE LED**

Available colors



NE/NE
Black/black

OO/NE
Matt gold
/black

NE/OO
Black/ Matt
gold

Customizable

EELc (Energy Efficiency Label compatibility) contain built in LED lamps that cannot be changed: A, A+, A++

SPLIAM1 _ _ _ _ LED

CUSTOMER _____

NOTES _____

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all built in LED luminaires is based on nominal ratings of the LED sources.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.