STILLA SUSPENSION - E210040X1X - technical sheet






E 2 100 4 0X 1 X Design by Manuel Vivian

Aluminium suspended lamp, also in a recessed version. Available in black or white. Built-in LED light source.

Typology: RECESSED SUSPENSION LAMP

Ratings

- •Built in ED module
- •CCT 3000 K
- Downlight
- •Ceiling cut-out installation
- •Supply constant current 350mA
- •Switch mode: on-off
- •Aluminium pendant, painted
- •Reflector and closing glass

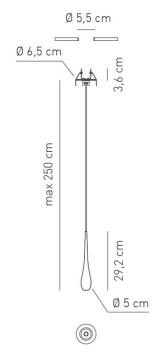

Product code composition

STILLA RECESSED / LED 6,5W / 350mA / DRIVER NOT INCLUDED

Zone	Туре	Article	System compatibility	Finish	LED colour temperature	Beam options
E	2	100	4 recessed	04 matt black	3000 K	2 47° ~688lm
				07 white 9016		3 60° ~668lm

C € ŵ with deplicated IP20 CRI80 LED

105lm/W (47° beam) - 102lm/W (60° beam)

foro - *hole* Ø 5,5 cm / profondità min - *min depth* 10 cm -

Collegare in serie. / Wire in series.

example composition code $\;\;$ $|E\;\;|2\;\;$ $|100\;\;|4\;\;|04\;|1\;\;$ $|3\;\;$

for optional accessories/drivers or dimming technology please refer to our pricelist or contact our representatives





04 Matt black



07 White RAL 9016

EELc (Energy Efficiency Label compatibility) contain built in LED lamps that cannot be changed: A, A+, A++

E210040 _ 1 _

CUSTOMER

NOTES

NOTICE:

Luminous flux (lm) and efficacy (lm/W) for all built in LED luminaires is estimated based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.