

Item

T58T065-A6C0C2840X3M
butler Floor lamp silver 650x375

General

LED 4000K 85W 9769lm
"1:3 direct-indirect emission of light Lamp head
LxWxH 650x375x40mm Lamp height: 1950mm On/off
button dimmer 4000mm transparent supply cable
with two-pin earthed plug"

Illuminant

LED
EEI A+
Colour rendering index (CRI) > 80
MacAdam 3
UGR < 19

Dimension

LxWxH: 650x375x40/1950mm

Surface/Colour

Material: anodised aluminium / steel sheet
powder-coated with fine matte finish
Surface/Colour A6C0 / RAL9006 silver

Lens

PMMA microprismatic
polycarbonate clear (id)

Protection rating


IP20 / Protection class I

Connection

230V 50/60Hz
incl. Dimmable converter

Weight

17,0 kg

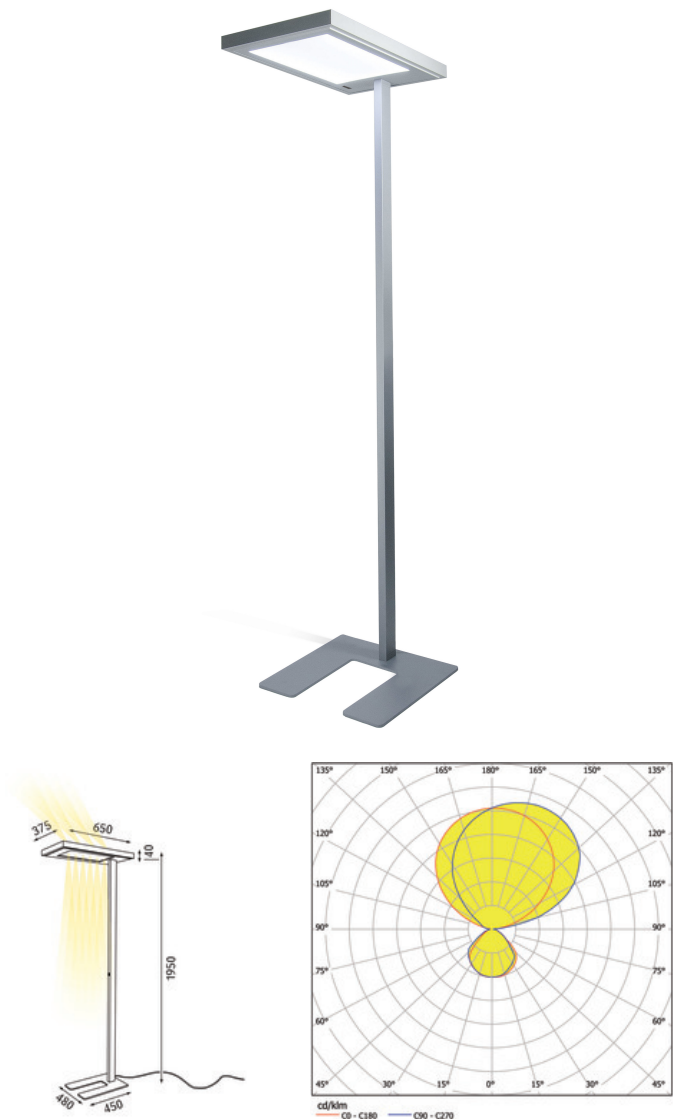

Product-Information

High-class LED floor lamp designed for direct-indirect light emission, in a flat, rectangular design made of extruded aluminium natural anodised finish 'A6C0'. Foot plate made of steel sheet with a fine structure in powder coating silver RAL9006. Direct-indirect emission of light in a 1:3 proportion. Inclined LED boards on the indirect side for optimal lighting of working space. Direct light emission through a light guiding plate (LGP) with a PMMA microprism for a homogeneous light emission and reduced glare with a Unified Glare Rating (UGR) < 19 with an efficiency of 115 lm per W. Indirect light emission through a clear polycarbonate diffuser. Luminaire equipped with the latest generation of LED boards with a Colour Rendering Index (CRI) > 80, a small colour tolerance MacAdam 3, Rated lifetime of minimum 50.000 h [according to EU decree No. 1194/2012], Energy Efficiency Index (EEI) A+. Ingress Protection IP20, Protection Class I. Colour temperature of 4000 K. Converter included, dimmable with on / off push button in the range 10 % to 100 %. Dimensions: Luminaire 650x375x40 mm (LxWxH), foot plate 450x480x7 mm (LxWxH), Lamp total height 1950 mm. Weight: 17 kg

