





References

-  **TOT3 S LED DIM0-10V**
-  **TOT3 S LED DIMBT**

Certificates

-  **CE**
- Class I
- Dimmable:
120 - 277V
- Bluetooth Dimming:
220 - 240V
- 
The mark of responsible forestry


Wood shade colours

-  20 Ivory White
-  21 Natural Cherry
-  22 Natural Beech
-  24 Yellow
-  25 Orange
-  26 Red
-  28 Blue
-  29 Grey
-  30 Turquoise
-  31 Chocolate
-  32 Pink




REF. TOT3 S LED 20 & TOT4 S LED 20
Totem 3 - Small & Totem 4 - Medium


Components



-  **Metal canopy**
Brushed Nickel
ø 14 cm - disc ø 20 cm
- Electrical cable**
Transparent 2 m drop
- Steel cable**
3 x 2 m drop

Packaging




-  **Box size**
Shades
box 1: 76 x 76 x 69 cm
0,399 m³ | 7,1 Kg
box 2: 66 x 66 x 52 cm
0,227 m³ | 5,9 Kg
box 3: 51 x 51 x 62 cm
0,161 m³ | 4 Kg
Electrical kit
box 4: 182 x 37 x 25 cm
0,168 m³ | 9,5 Kg

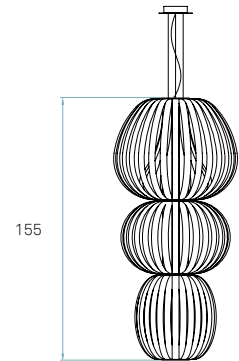


Weight
Gross - 26,5 Kg
Net - 10 Kg

 **Required**
Shade to base mount
Difficulty: *****



ø 73

-  **LED**
- LED**
 **Linear Module**
20 x 5,5 W 350mA
- Energy class**
 **A+**
LED integrated

-  **INFO**
- Driver**
 EFORE
2 units - Ref. RCL030-0900B
-  EFORE
2 units - Ref. RCL030-0900B
+ Bluetooth Control - CASAMBI / ELT
1 unit - Ref. CBU - ASD
- Driver housed in fixture.

Details

Input Voltage	Luminous Flux	CRI	Watt.	CCT	Lifetime (L70)
120 - 277V / 220 - 240V	N/A	90	60 W	3000 K	40000h