

FEBO EVO

1E3189EL

LIGHT SOURCE **LED** COLOUR TEMPERATURE **2700K** POWER (SOURCE) **34W** CRI **84** BEAM ANGLE **WFL**
 COLOUR AND FINISH **FERRITE** POWER SUPPLY **220-240Vac 50/60Hz** DRIVER **ELECTRONIC** DRIVER INCLUDED **YES**
 INSULATION CLASS **CLASS 2** GLOBAL IP OR HOUSING **IP67** F CLASS **YES**



CONCEPT

Inground or wall LED fixture with grazing lighting effect.

MATERIALS

Extruded aluminium body, die-cast aluminium optical head with black radial blades.

SOURCE


Multiple sources circuit, mid-power LED with flip-chip technology, Ra>80.

OPTIC

Optical unit composed of a collimating toroidal lens in transparent, optical grade PMMA.

POWER SUPPLY


Available in electronic or DALI power supply inserted into the fixture. Includes a watertight connection system inside the fixture. Casambi control system available as an accessory (only for DALI versions). 220-240Vac 50/60Hz

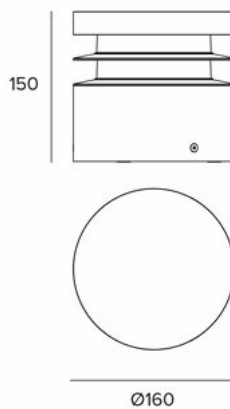

All the measures are expressed in mm


Photometries

| 2700K Ra84 | |
|---------------|--------|
| Fixture Power | 38W |
| Source Flux | 4364lm |
| Fixture Flux | 2356lm |
| Efficacy | 62lm/W |
| Imax | 1250cd |



Accessory Codes

Optical



1E3399

Shutter

120° shutter kit (with 4 cut zones that allow to shutter even 105°/90°/75°/60° angles). Max. no. of kits per product: 2.