

# XGQ1031 - XGQ1031 LED

Lighting fixture for wall built-in installation for interiors, with indirect light emission.

Total built-in plaster structure for masonry or plasterboard.

Aluminium dissipation plate.

Flat frosted glass diffuser.

Fixing brackets in micro-perforated sheet metal.


Recessed housing for masonry in galvanized sheet metal to be ordered separately.

Built-in hole dimension: 410x310mm (16,1x12,2")

## DATA SHEET



Code	XGQ1031 LED
System power consumption	13W
Efficacy	68.62lm/W
Light source	LED
Colour temperature	3000K Ra >80
Light distribution	diffused
Power supply	220-240V AC
Frequency	50/60Hz
Electrical configuration	ON-OFF
Driver	integrated included
Nominal luminous flux	1460lm
Lumen output	892lm
Efficiency	61.096%
Weight	3,2320Kg
Protection degree	IP20

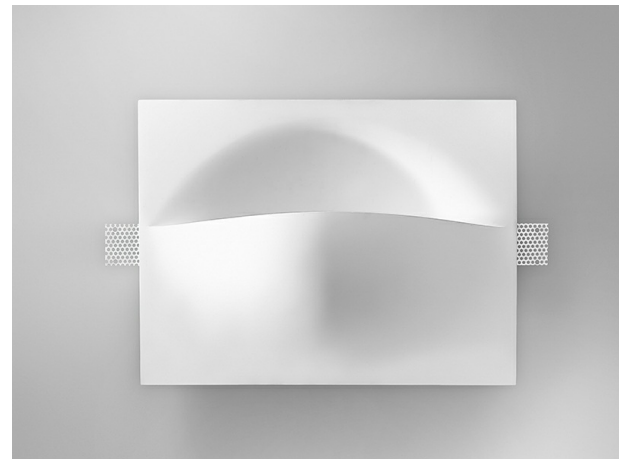

 Colour  
plaster





## ACCESSORIO


XM1031	Galvanized sheet housing to be recessed in brick walls or concrete.
--------	---



# TECHNICAL DRAWING



# DIAGRAMMA POLARE

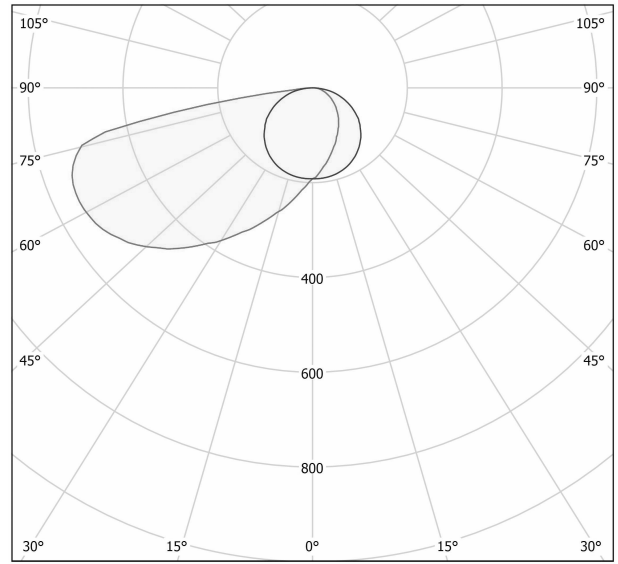

cd/klm  
 — C0 - C180    - - - C90 - C270

$\eta = 100\%$

