


FALLING LEAF UP ROUND 16 alu pol/maroon
DL00-2

warmDIM

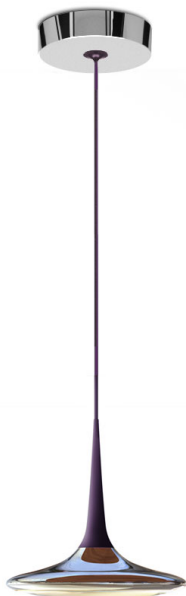

TECHNICAL SPECIFICATIONS

Lamp holder	LED
Mounting method	surface-mounted
warmDIM	Yes
Light emission	direct
Light distribution	symmetric
Level of light output efficiency	100 %
Luminaire luminous flux	1037 lm
Colour temperature	2700-2200 K
Colour rendering index (CRI)	> 90
White impression	warm white
Rated voltage (range)	220-240 V / 120 V
Power frequency	50/60 Hz
Power consumption (maximum)	16 W
Housing material	aluminium / Santoprene
Type of lamp control gear	Driver
Ballast included	Yes
Protection class	I
Energy efficiency	A - A++
Dimmable	Yes
Type of Dimmer	Phase cutting (electronic)
Diameter	240 mm
Suspension length	-/3000 mm
Net weight	2,0 kg

LIGHT DIAGRAM

