


NICEONE IN alu pol/grey
CNO01-0

warmDIM

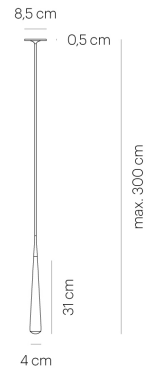

TECHNICAL SPECIFICATIONS

Lamp holder	LED
Mounting method	ceiling-mounted (recessed)
warmDIM	Yes
Light emission	direct
Light distribution	symmetric
Luminaire luminous flux	620 lm
Colour temperature	2700-2200 K
Colour rendering index (CRI)	> 90
Rated voltage (range)	220-240 V / 120 V
Power frequency	50/60 Hz
Power consumption (maximum)	11 W
Surface	polished
Housing material	aluminium
Type of lamp control gear	Driver
Ballast included	Yes
Protection class	I
Connection cable (number of cores)	3
Number of lampheads	1
Energy efficiency	A - A++
Dimmable	Yes
Type of Dimmer	phase rotary dimmer
Height	310 mm
Diameter	40 mm
Head adjustable	No
Mounting depth	60 mm
Height adjustable	No
Mounting diameter	68 mm
Suspension length	-/3000 mm
Custom length	Yes

tobias grau