


NICEONE RAIN OVAL 6 white/white/white
CNO06-3

warmDIM

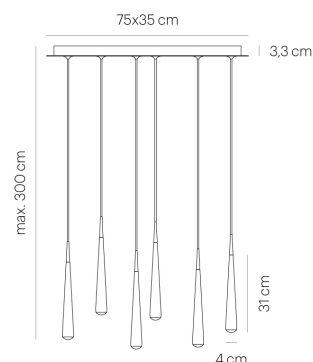

TECHNICAL SPECIFICATIONS

Mounting method	ceiling-mounted (surface)
warmDIM	Yes
Light emission	direct
Light distribution	symmetric
Luminaire luminous flux	6 x 620 lm
Colour temperature	2700-2200 K
Colour rendering index (CRI)	> 90
White impression	warm white
Rated voltage (range)	220-240 V / 120 V
Power frequency	50/60 Hz
Power consumption (maximum)	6x 11 W
Surface	powder-coated
Housing material	aluminium
Type of lamp control gear	Driver
Ballast included	Yes
Protection class	I
Connection cable (number of cores)	3
Number of lampheads	6
Energy efficiency	A - A++
Dimmable	Yes
Type of Dimmer	phase rotary dimmer
Length	750 mm
Width	350 mm
Height adjustable	No
Suspension length	-/2500 mm
Custom length	Yes
	powder-coated
	aluminium