
## XT-A FLOOR PLUS 90 C-BASE chrome/white

XA40-6

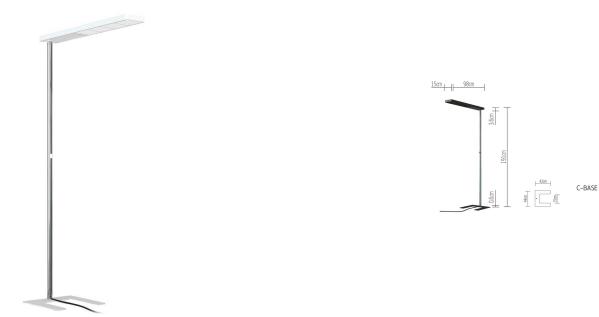


## **TECHNICAL SPECIFICATIONS**

Lamp holder Mounting method Light emission Light distribution Luminaire luminous flux Color temperature Power consumption (maximum) Colour rendering index (CRI) Complies with EN12464 max. luminance >65° UGR Rated voltage (range) Power frequency Surface Housing material Type of lamp control gear Ballast included Protection class Number of lampheads Energy efficiency Dimmable Type of Dimmer Presence sensor Sensors can be switched off With constant light controller Remote control included Material of the grid Width Height Length of connection cable lamphead is rotatable

LED Floor 10% direct / 90% indirect symmetric 14500 lm 3500 K 98 W 85 Yes 600 cd/qm 13.5 220-240 V 50-60 Hz chromed aluminium Driver Yes I 1 A - A++ Yes Integrated pushbutton Yes Yes Yes Yes plastic 150 mm 1910 mm 2900 mm Yes

tobias grau

LIGHT DIAGRAM



CE