


Half



**Milan**



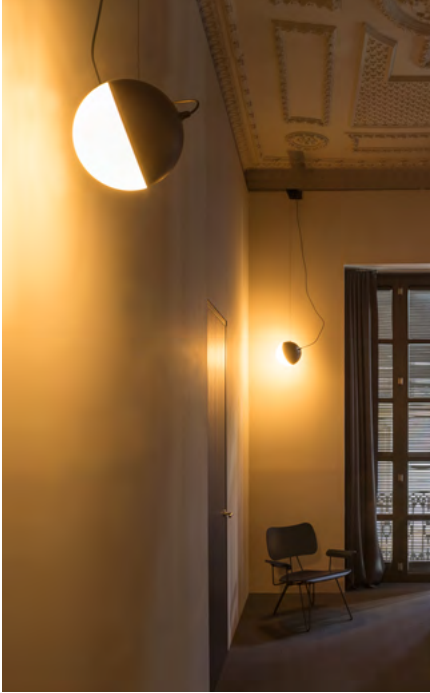

### MLN HALF

Ø160 mm | H Max. 1.500 mm

1x E27 Spherical bulb retrofit

led 5,5 W

396 lumen | 2.700 K

Dimmable


☐ Class II: Basic insulate plus reinforced insulation

### Finishes

6733 ● NE

6735 ● OG

6734 ● VI



4782 ● NE

149



67


4783 ● NE



600

143

4784 ● NE



600

143

### DOWNLOADS

[Catálogo](#)

### 3D Files

[6733+4782](#) [6734+4784](#)

[6733+4783](#) [6735+4782](#)

[6733+4784](#) [6735+4783](#)

[6734+4782](#) [6735+4784](#)

[6734+4783](#)

### 3D Max Files

[6733+4782](#) [6734+4784](#)

[6733+4783](#) [6735+4782](#)

[6733+4784](#) [6735+4783](#)

[6734+4782](#) [6735+4784](#)

[6734+4783](#)

[Assembly instructions](#)

[Photometric curve](#)

### Economic efficiency index

[6733](#)

[6734](#)

[6735](#)

A true emotional interpretation of the moon.

Sphere of 160 mm diameter, formed by two hemispheres: bases stamped in steel with finishes in lacquered matte black (RAL 9005), lacquered mink (NCS S 2005-Y10R) and lacquered olive grey (RAL 6006), an diffusing screen made of satin opal acid-etched blown glass. Black electrical cable, 2 meters long.

Hanging versions come with a steel cable with internal safety system, for adjusting the desired height of the head.

Canopies for one, three or five suspensions. Individually each canopy has a rotation system from its axis, up to 350 degrees.



### MLN HALF

Ø 250mm | H Max. 1.600mm

1x E27 Standard bulb

led 9 W




888 lumen | 2.700 K

Dimmable

☐ Class II: Basic insulate plus reinforced insulation

#### Finishes

6736 ● NE 6738 ● OG  
6737 ● VI



### MLN HALF

Ø 350mm | H Max. 1.700mm

1x E27 Spherical bulb retrofit

led 12 W




1.000 lumens | 2.700 K

Dimmable

☐ Class II: Basic insulate plus reinforced insulation

#### Finishes

6739 ● NE 6741 ● OG  
6740 ● VI

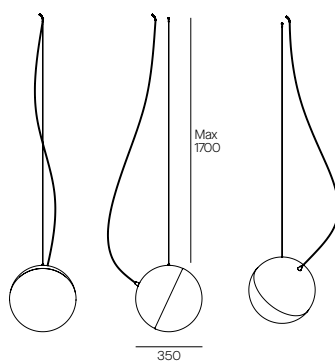

Sphere of 250 or 350 mm diameter, formed by two hemispheres: bases stamped in steel with finishes in lacquered matte black (RAL 9005 ), lacquered mink (NCS S 2005-Y10R) and lacquered olive grey (RAL 6006), an diffusing screen made of satin opal acid-etched blown glass. Black electrical cable, 2 meters long.

Black electrical cable, 2 meters long. Hanging versions come with a steel cable with internal safety system, for adjusting the desired height of the head.

Canopies for one or three suspensions. Individually each canopy has a rotation system from its axis, up to 350 degrees.

### DOWNLOADS

[Catálogo](#)

#### 3D Files

6736+4782 6739+4782  
6736+4783 6739+4785  
6737+4782 6740+4782  
6737+4783 6740+4785  
6738+4782 6741+4782  
6738+4783 6741+4785

#### 3D Max Files

6736+4782 6739+4782  
6736+4783 6739+4785  
6737+4782 6740+4782  
6737+4783 6740+4785  
6738+4782 6741+4782  
6738+4783 6741+4785

[Assembly instructions](#)

[Photometric curve](#)

[Economic efficiency index](#)

6736  
6737  
6738  
6739  
6740  
6741