



**SP LAY B**

Design by Vanessa Vivian

Collection consisting of suspended lamps with a metal frame covered with strips of extra smooth flame-retardant pongé fabric. Available in several colours and sizes. Screw fitting light source.

Typology: SUSPENSION LAMP


**Ratings**

- E27
- Diffused light
- Surface installation over holes
- Supply voltage ~220-240V
- Switch mode: on-off
- Steel frame

Product code composition

**LAYERS** / diffuser INCLUDED, with upward and downward lighting

Type	Article	Colours	Finish	Source
SP	LAY B XX E27	<b>BC</b> white <b>AR</b> orange <b>BW</b> warm white <b>GI</b> gold yellow <b>GR</b> light grey <b>GS</b> dark grey <b>MT</b> brick red <b>RB</b> burgundy <b>RS</b> red <b>VE</b> light green <b>M1</b> multicolor 1: RB+RS+AR+GI <b>M2</b> multicolor 2: GS+GR+BC	XX	<b>E27</b> 15 x Max 16W LED or 15 x Max 20W fluo or 15 x Max 70W halo

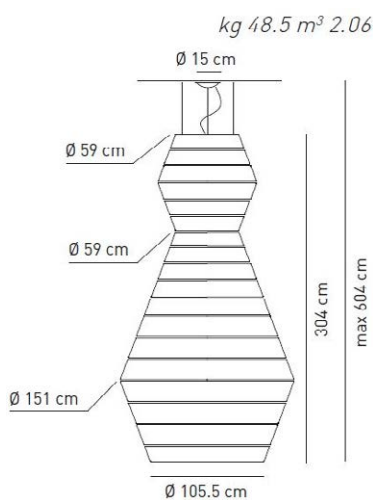


Extra smooth flame retardant pongé fabric  
 Composition 100% polyester  
 Weight 55 ±5% gr/m<sup>2</sup>  
 Glow wire 960 °C



example composition code | SP | LAYBXXE27 | RS | XX

Available colors



**BC** White    **AR** Orange    **BW** Warm white    **GI** Gold yellow    **GR** Light grey    **GS** Dark grey    **MT** Brick red    **RB** Burgundy    **RS** Red    **VE** Light green    **M1** Multicolor M1    **M2** Multicolor M2

EELc (Energy Efficiency Label compatibility): E, D, C, B, A, A+, A++

SPLAYBXXE27\_\_XX

CUSTOMER \_\_\_\_\_ NOTES \_\_\_\_\_

Luminous flux (lm) and efficacy (lm/W) for all built-in LED luminaires is estimated based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.