

SPSKR070

Design by Manuel Vivian

Collection of ceiling, suspended and table lamps in flame-retardant TREVIRA®CS fabric (100% polyester Glow wire 960 °C), available in several sizes and colours. The fabric can also come in a double-layer version with an exterior black net fabric. A decorative inner lampshade (also printable with customized graphic) is available.

Typology: SUSPENDED

Ratings


- E27
- Downlight and uplight
- Surface installation over holes
- Supply voltage ~220-240V
- Switch mode: on-off
- Steel frame, painted
- Cone in pongé fabric and light covering in jersey

Product code composition

SKIRT / diffuser INCLUDED

Type	Article	Exterior Net	Fabric Colours	Source
SP	SKR 070 E27	NE black net	BC white	E27 1 x Max 20W LED or 1 x Max 33W fluo or 1 x Max 70W halo
		XX no black net	AR orange	
			AZ light blue	
			BL blue	
			FU fuchsia	
			GR light grey	
			MA brown	
			RS red	
			VE light green	

kg 6.5 m³ 0.43

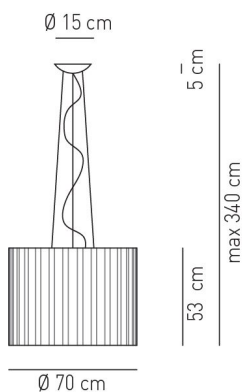

SINGLE FABRIC

Fireproof class I= C1, GB= CRIB 5, D=B1, F= M1, EN= 102/1-2, A 652 / Weight 340 ± 5% gr/m² / Abrasion resistance (Martindale): 40.000 ± 10% rubs / Pilling Grade 5 / Light fastness grade 6


BLACK NET FINISH FABRIC

Fireproof class I= C1, F= M1, D= B1 DIN 4102 / Weight 214 ± 5% gr/m² / Abrasion resistance (Martindale): 30.000 ± 10% rubs / Pilling Grade 5 / Light fastness grade 5



example composition code | SP | SKR070E27 | NE | MA |

Available colors



BC White AR Orange AZ Light blue BL Blue FU Fuchsia GR Light grey MA Brown RS Red VE Light green



Black net over a white fabric NEBC

EELc (Energy Efficiency Label compatibility): E, D, C, B, A, A+

SPSKR070E27_ _ _ _

CUSTOMER _____

NOTES _____

NOTICE:
Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is estimated based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.